



SpeechLine Digital Wireless

FEATURES

- Automatic frequency and interference management
- Speech optimized gain automatics
- License free 1.9 GHz frequency range
- Secure 256 bit AES encryption
- Remote control via Ethernet
- Advanced power management and Li-ion rechargeables
- Up to 20 channels per range

For more information on the SpeechLine Digital Wireless series please refer to the SpeechLine Digital Wireless product page at:

www.sennheiser.com/speechline-dw



SpeechLine Digital Wireless is a presentation solution dedicated to speech. The digital wireless microphone system is a future-proof solution that's easy to set up, use and manage. A microphone which lets the presenter concentrate on their words, not on the technology.

SpeechLine Digital Wireless comprises of mobile transmitters (handheld, bodypack, tablestand and boundary) tailored for presentation, speech optimized microphone capsules (condenser capsules, lavalier or headworn microphone) and easy-to-integrate single-channel and multi-channel receivers. For convenience, the system relies on lithium-ion technology with a battery lifetime of more than 15 h and flexible charging solutions of multi-device chargers or USB-charging on the fly.

Thanks to the Automatic Frequency Management, the system always finds a free frequency (no frequency planning is necessary anymore). The Automatic Interference Management always maintains a strong connection, which makes the system very reliable. The Automatic Sensitivity Management makes the setup even more convenient, no more gain settings are required. With seamless network integration the system can be controlled via the Sennheiser Control Cockpit software or media control systems (e. g. AMX, Crestron), which makes SpeechLine DW easy to monitor and to manage.

For secure communication, SpeechLine Digital Wireless uses the secure advanced 256-bit AES encryption for secure wireless transmission.

Due to the 1.9 GHz frequency range SpeechLine DW is the future proof investment and already DD ready. Moreover, the 1.9 GHz is license free and requires no registration.



SpeechLine Digital Wireless

SPECIFICATIONS

System

AF frequency response	20 to 20,000 Hz
Dynamic range	> 120 dB(A)
THD (1 kHz)	typ. 0.1 %
Audio sampling	24 bit/48 kHz
Signal-to-noise ratio	> 90 dB(A)
Encryption	AES 256
RF frequency ranges	EU: 1,880 to 1,900 MHz USA: 1,920 to 1,930 MHz Brazil: 1,910 to 1,920 MHz Taiwan: 1,880 to 1,895 MHz Japan: 1,893 to 1,906 MHz
Modulation	GFSK with back channel
Transmission method	TDMA, space diversity
Latency	19 ms
Relative air humidity	max. 95 %
Temperature range*	Operation: -10 °C to 55 °C (14 °F to 131 °F) Storage: -20 °C to 70 °C (-4 °F to 158 °F)

* The temperature range is influenced by the battery characteristics

SL MCR DW

RF sensitivity	< -90 dBm
RF output power back channel	adaptive or manual, up to 250 mW (country-specific)
Network protocol	Media Control Protocol, UDP IPv4 (DHCP, Manual)/IPv6, mDNS (switchable)
Power supply	PoE IEEE 802.3af Class 3
Audio outputs	One 3-pin socket (suitable for Phoenix Contact MCVW 1.5-3-ST-3.81) Two Dante™ Digital Audio Network sockets (RJ-45)
Weight	650 g (incl. wallmount) 560 g (without wallmount)
Dimensions	180 x 180 x 45 mm (incl. wallmount)
Operating temperature	-10 °C to +45 °C (14 °F to 113 °F)
Storage temperature	-20 °C to +70 °C (-4 °F to 158 °F)
Relative air humidity	max. 95 %

SL Rack Receiver DW

RF sensitivity	< -90 dBm
RF output power back channel	adaptive, up to 250 mW (country-specific)
XLR output level, balanced	max. +18 dBu
RCA output level, unbalanced	max. +6 dBu
Audio effects	Low cut: -3 dB at 120 Hz Equalizer: 7-band graphic equalizer with sound presets Sound profiles: - female voice - male voice - instrument/media
Display	OLED
Network protocol	Media Control Protocol, TCP/IP IPv4 (DHCP, manual)/IPv6
Power supply	12 V DC
Current consumption	350 mA
AF connection sockets	XLR/2 x RCA
Antenna sockets	2 x reverse SMA
Network sockets	RJ-45
DC socket for power supply	hollow jack
Weight	approx. 828 g (1.83 lbs)

Power supply units (for SL Rack Receiver DW)

	NT 12-4C	NT 2-3
Nominal input voltage	100 to 240 V AC	
Power frequency	50 or 60 Hz	
Input current	max. 120 mA	
Nominal output voltage	12 V DC	
Standby power consumption	≤ 0.3 W	
Energy efficiency level	V	IV
Operating temperature	-10 °C to 55 °C (14 °F to 131 °F)	
Storage temperature	-20 °C to +70 °C (-4 °F to 158 °F)	
Relative air humidity	max. 95 %	
Weight	approx. 100 g (0.22 lbs)	approx. 105 g (0.23 lbs)




SpeechLine Digital Wireless

SL Handheld DW

RF output power	adaptive, up to 250 mW (country-specific)
AF frequency response	50 to 20,000 Hz
Input sensitivity	automatic sensitivity adjustment
Power supply	Accupack: BA 10 (Li-ion, 3.7 V) Batteries**: 2 x AA size battery (1.5 V)
Operating time	Accupack: typ. 15 h Batteries**: typ. 10 h
Display	LCD
Mute switch	available
Weight (without accupack)	approx. 262 g (0.58 lbs) incl. microphone head

** optional accessory

SL Bodypack DW

RF output power	adaptive, up to 250 mW (country-specific)
AF frequency response	Mic: 50 to 20,000 Hz Line: 20 to 20,000 Hz
Max. input level	Mic: 2.2 V RMS Line: 3.3 V RMS
Line input impedance	1 MΩ
Input sensitivity	automatic sensitivity adjustment
Power supply	Accupack: BA 30 (Li-ion, 3.7 V) Batteries**: 2 x AA size battery (1.5 V)
Operating time	Accupack: typ. 15 h Batteries**: typ. 11 h
AF connection socket	3.5 mm jack socket, lockable 
Weight (without accupack)	approx. 88 g (0.19 lbs)

** optional accessory

SL Tablestand 133-S DW

AF frequency response	75 to 20,000 Hz
Max. input level	1.7 V RMS
Input impedance	30 kΩ
Power supply	BA 40 accupack (Li-ion, 3.6 V)
Operating time	Accupack: typ. 11 h

Relative humidity	max. 95 %
Dimensions	166.7 x 120.2 x 47.9 mm (6.56" x 4.73" x 1.88")
Weight	approx. 660 g (1.46 lbs) (without accupack)
Operating temperature	10 °C to 45 °C (50 °F to 113 °F)

SL Tablestand 153-S DW

AF frequency response	75 to 20,000 Hz
Max. input level	1.7 V RMS
Input impedance	30 kΩ
Power supply	BA 40 accupack (Li-ion, 3.6 V)
Operating time	Accupack: typ. 10 h
Relative humidity	max. 95 %
Dimensions	166.7 x 120.2 x 47.9 mm (6.56" x 4.73" x 1.88")
Weight	approx. 660 g (1.46 lbs) (without accupack)
Operating temperature	10 °C to 45 °C (50 °F to 113 °F)

SL Boundary 114-S DW

AF frequency response	40 to 20,000 Hz
Pickup pattern	cardioid
Dynamic range	< 100 dB(A)
Sensitivity	10 mV/PA
Power supply	BA 40 accupack (Li-ion, 3.6 V)
Operating time	Accupack: typ. 12 h
Relative air humidity	max. 95 %
Temperature range*	Operation: 10 °C to 45 °C (50 °F to 113 °F) Storage: -20 °C to 70 °C (-4 °F to 158 °F)
Dimensions	114 x 85.3 x 30.8 mm (4.49" x 3.36" x 1.21")
Weight (without accupack)	approx. 208 g (0.46 lbs)

* The temperature range is influenced by the battery characteristics

Microphones

	MME 865-1	MKE 1
Microphone type	pre-polarized condenser microphone	
Sensitivity	1.6 mV/Pa	5 mV/Pa
Pick-up pattern	super-cardioid	omni-directional
Max. SPL	152 dB SPL	142 dB SPL



SpeechLine Digital Wireless

CHG 2

Input voltage	12 V DC
Input current	max. 1.1 A
DC connection	
Charging voltage	5 V DC
Charging current	max. 2 x 1 A
Compatible accupacks	Sennheiser BA 10, BA 30
Charging time for full charge at 20 °C	100 % = approx. 160 min = green
Temperature range	Operation: 0 °C to 45 °C (32 °F to 113 °F) Storage: -20 °C to 70 °C (-4 °F to 158 °F)
Relative air humidity, non-condensing	Operation: 25 % to 95 % Storage: 5 % to 95 %
IP protection class according to IEC/EN 60529	IP2X
Dimensions (W x D x H)	175 x 135 x 93 mm (6.89" x 5.31" x 3.66")
Weight (without power supply unit)	approx. 375 g (0.83 lbs)

CHG 2N

Network protocol	Media Control Protocol IPv4 (DHCP, manual) / IPv6
Power supply	12 V DC
Current consumption	1.2 A
Network socket	RJ 45
Dimensions	140 x 100 x 102 mm (5.3" x 3.9" x 4")
Weight	609 g
Charging bays	2
Charging voltage per bay	5 V
Charging current per bay	1 A
Charging status indicator	4 LEDs per bay (red, yellow, green, green)
Charging time for full charge	SL Handheld DW: 2 h SL Bodypack DW: 2 h
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)

CHG 4N

Network protocol	Media Control Protocol IPv4 (DHCP, manual) / IPv6
Power supply	12 V DC
Current consumption	2.5 A
Network socket	RJ 45
Dimensions	270 x 100 x 102 mm (10.6" x 3.9" x 4")
Weight	1100 g (2.43 lbs)
Charging bays	4
Charging voltage per bay	5 V
Charging current per bay	1 A
Charging status indicator	4 LEDs per bay (red, yellow, green, green)
Charging time for full charge	SL Handheld DW: 2 h SL Bodypack DW: 2 h
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)

CHG2W

Input voltage	12 V DC
Input current	1.67 A
Charging voltage	5 V DC
Charging current	max. 1 A
Power consumption	2.5 A
Charging time for full charge	SL Tablestand 133-S DW: on: 5 h / off: 3 h SL Tablestand 153-S DW: on: 5.5 h / off: 3 h
Temperature range	Operation: 5 °C to 35 °C (41 °F to 95 °F) Storage: -40 °C to 80 °C (-40 °F to 176 °F)
Dimensions	278 x 190 x 10 mm (10.9" x 7.5" x 0.4")
Weight	525 g (1.16 lbs)

Accupacks

	BA 10	BA 30	BA 40
Charging capacity	2200 mAh	2030 mAh	2200 mAh
Output voltage	3.6 V	3.7 V	3.6 V



SpeechLine Digital Wireless

SL PASC 2

Frequency range	1,880 - 1,930 MHz
Insertion loss	-4.5 dB typ.
Port to port isolation	22 dB min.
Input / Output return loss	-13 dB max.
Connectors	AC coupled ports
Max. input power	1.5 W
Dimensions	150 x 50 x 21 mm
Weight	135 g
Operating temperature	-40 to 85 °C
Relative humidity	max. 95 % (non-condensing)

SL PASC 4


Frequency range	1,880 - 1,930 MHz
Insertion loss	-8 dB typ.
Port to port isolation	26 dB min.
Input / Output return loss	-14 dB max.
Connectors	AC coupled ports
Max. input power	1.5 W
Dimensions	210 x 160 x 41 mm
Weight	663 g
Operating temperature	-40 to 85 °C
Relative humidity	max. 95 % (non-condensing)



SpeechLine Digital Wireless

DIMENSIONS


SL Rack Receiver DW

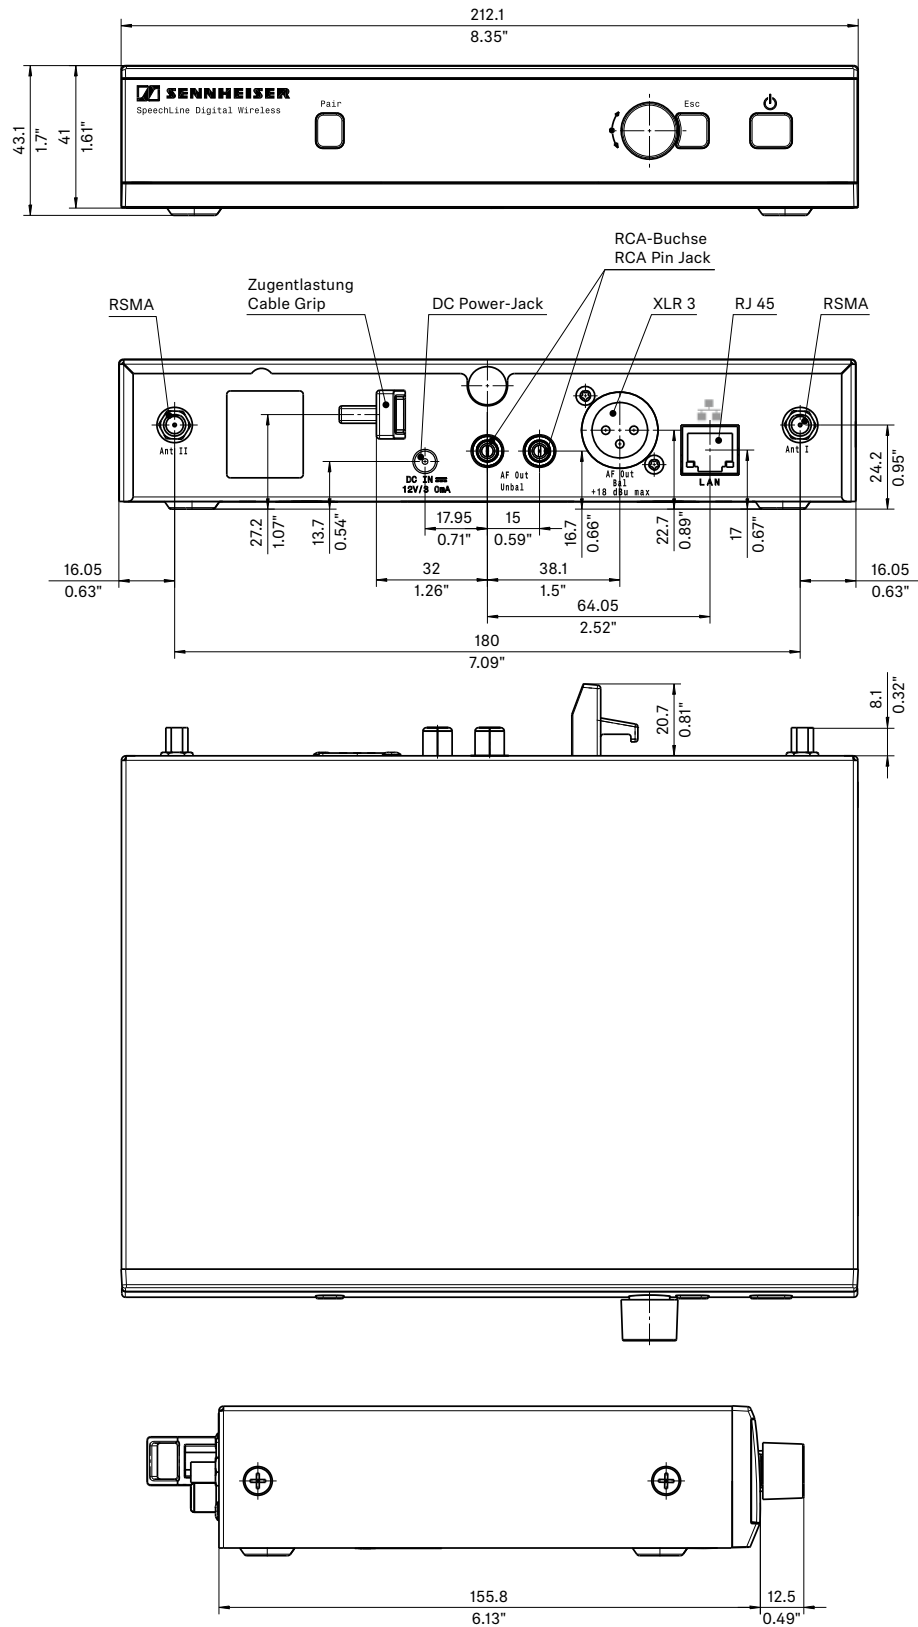



SpeechLine Digital Wireless


SL MCR DW

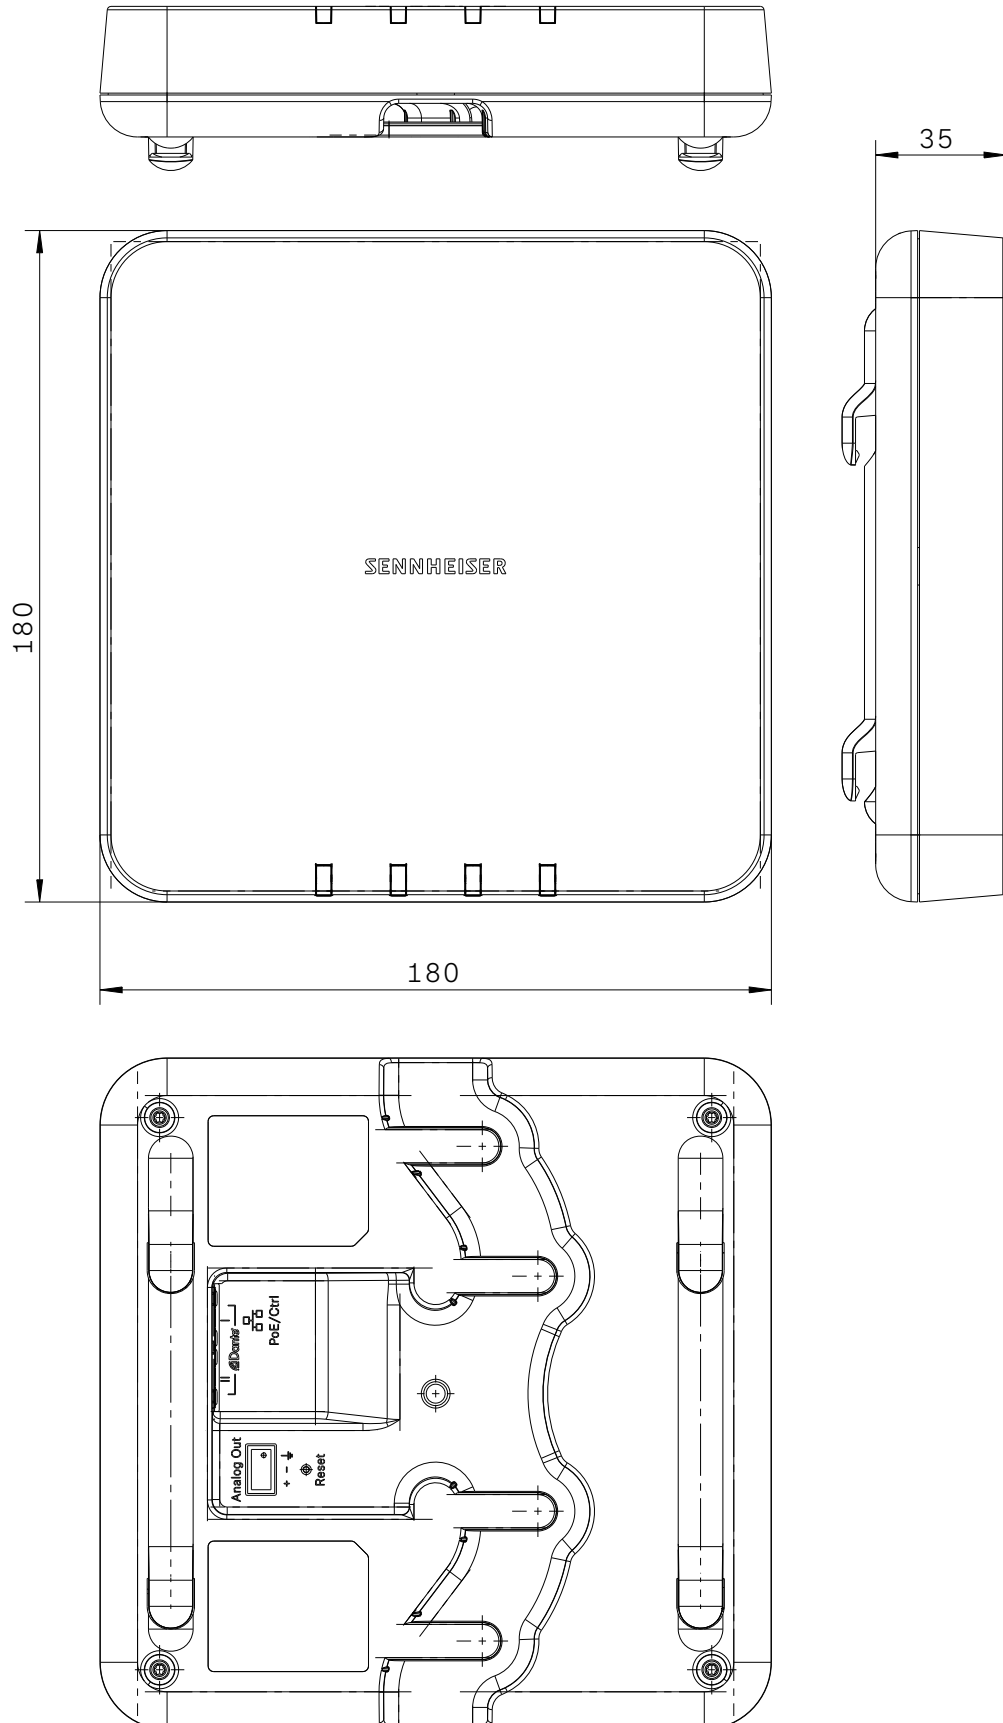



SpeechLine Digital Wireless


SL Handheld DW

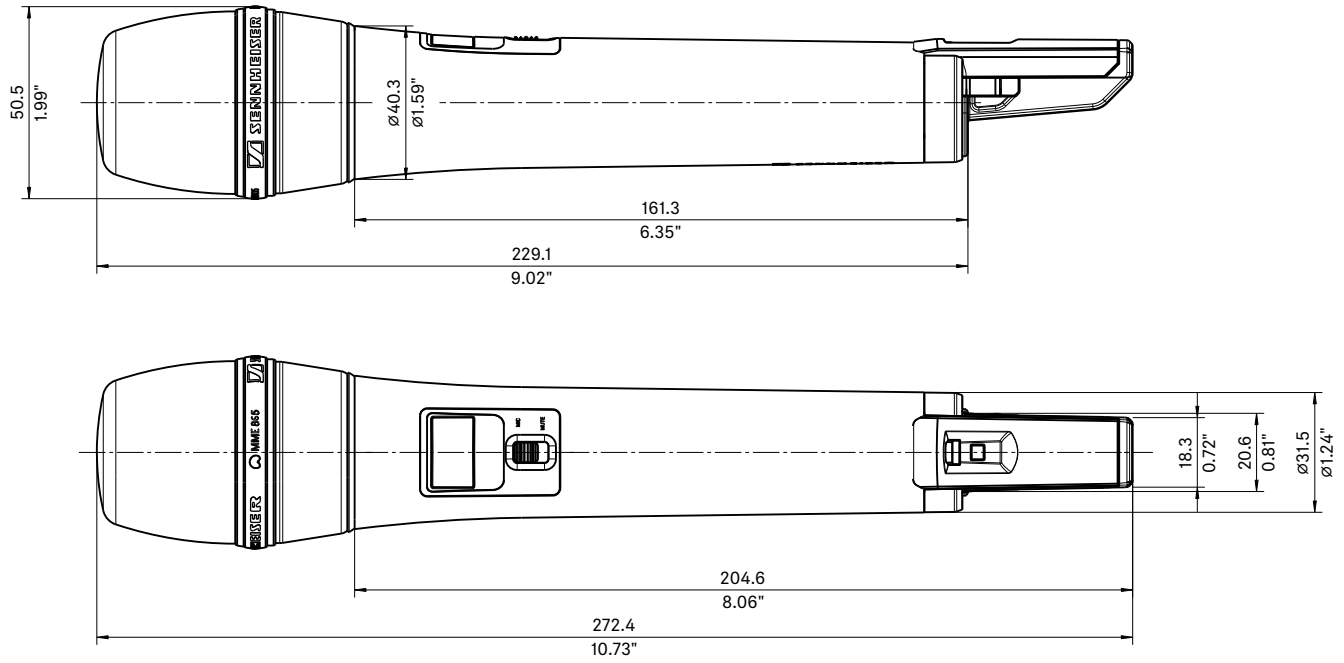



SpeechLine Digital Wireless


SL Bodypack DW

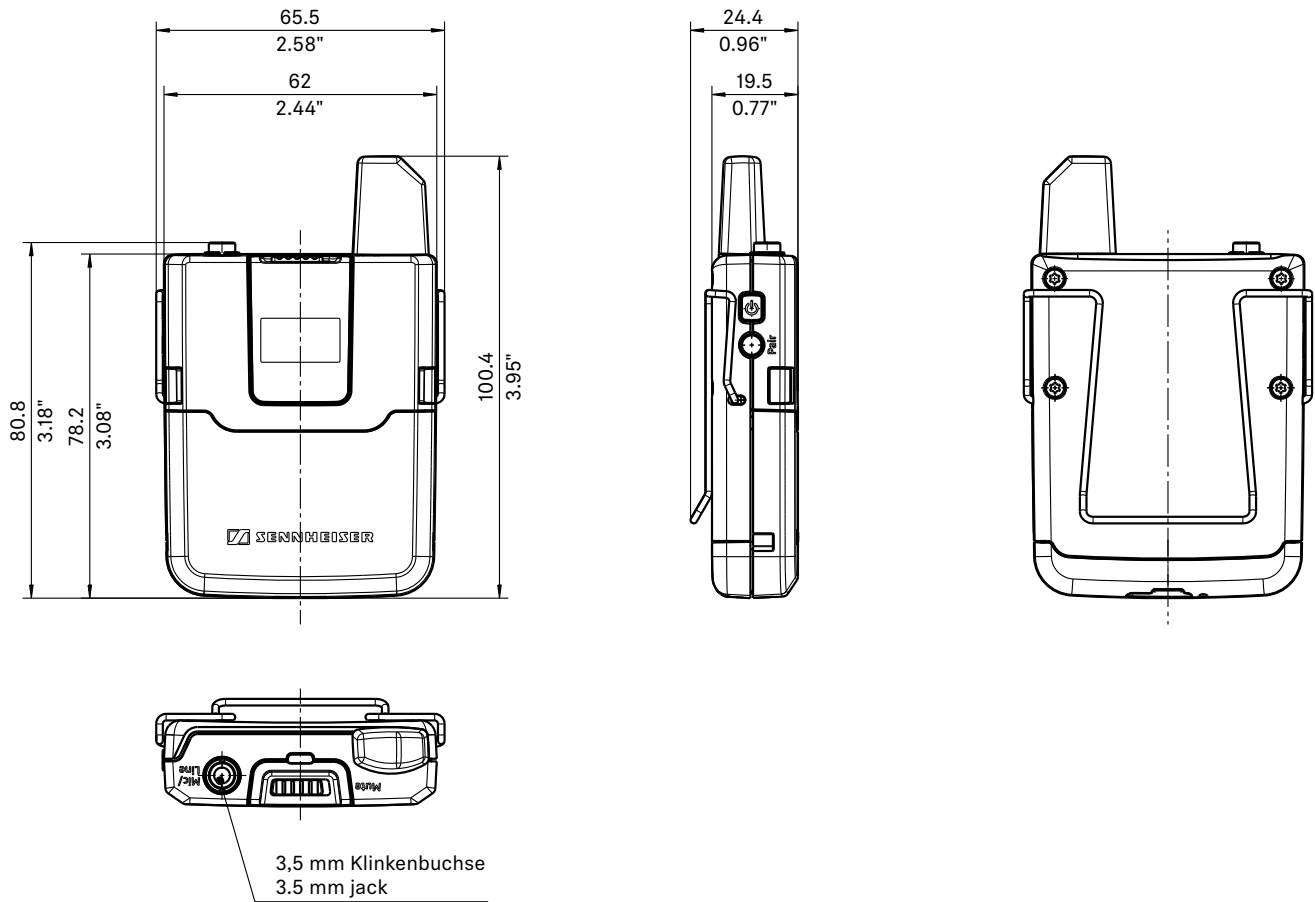



SpeechLine Digital Wireless


SL Tablestand 133-S DW

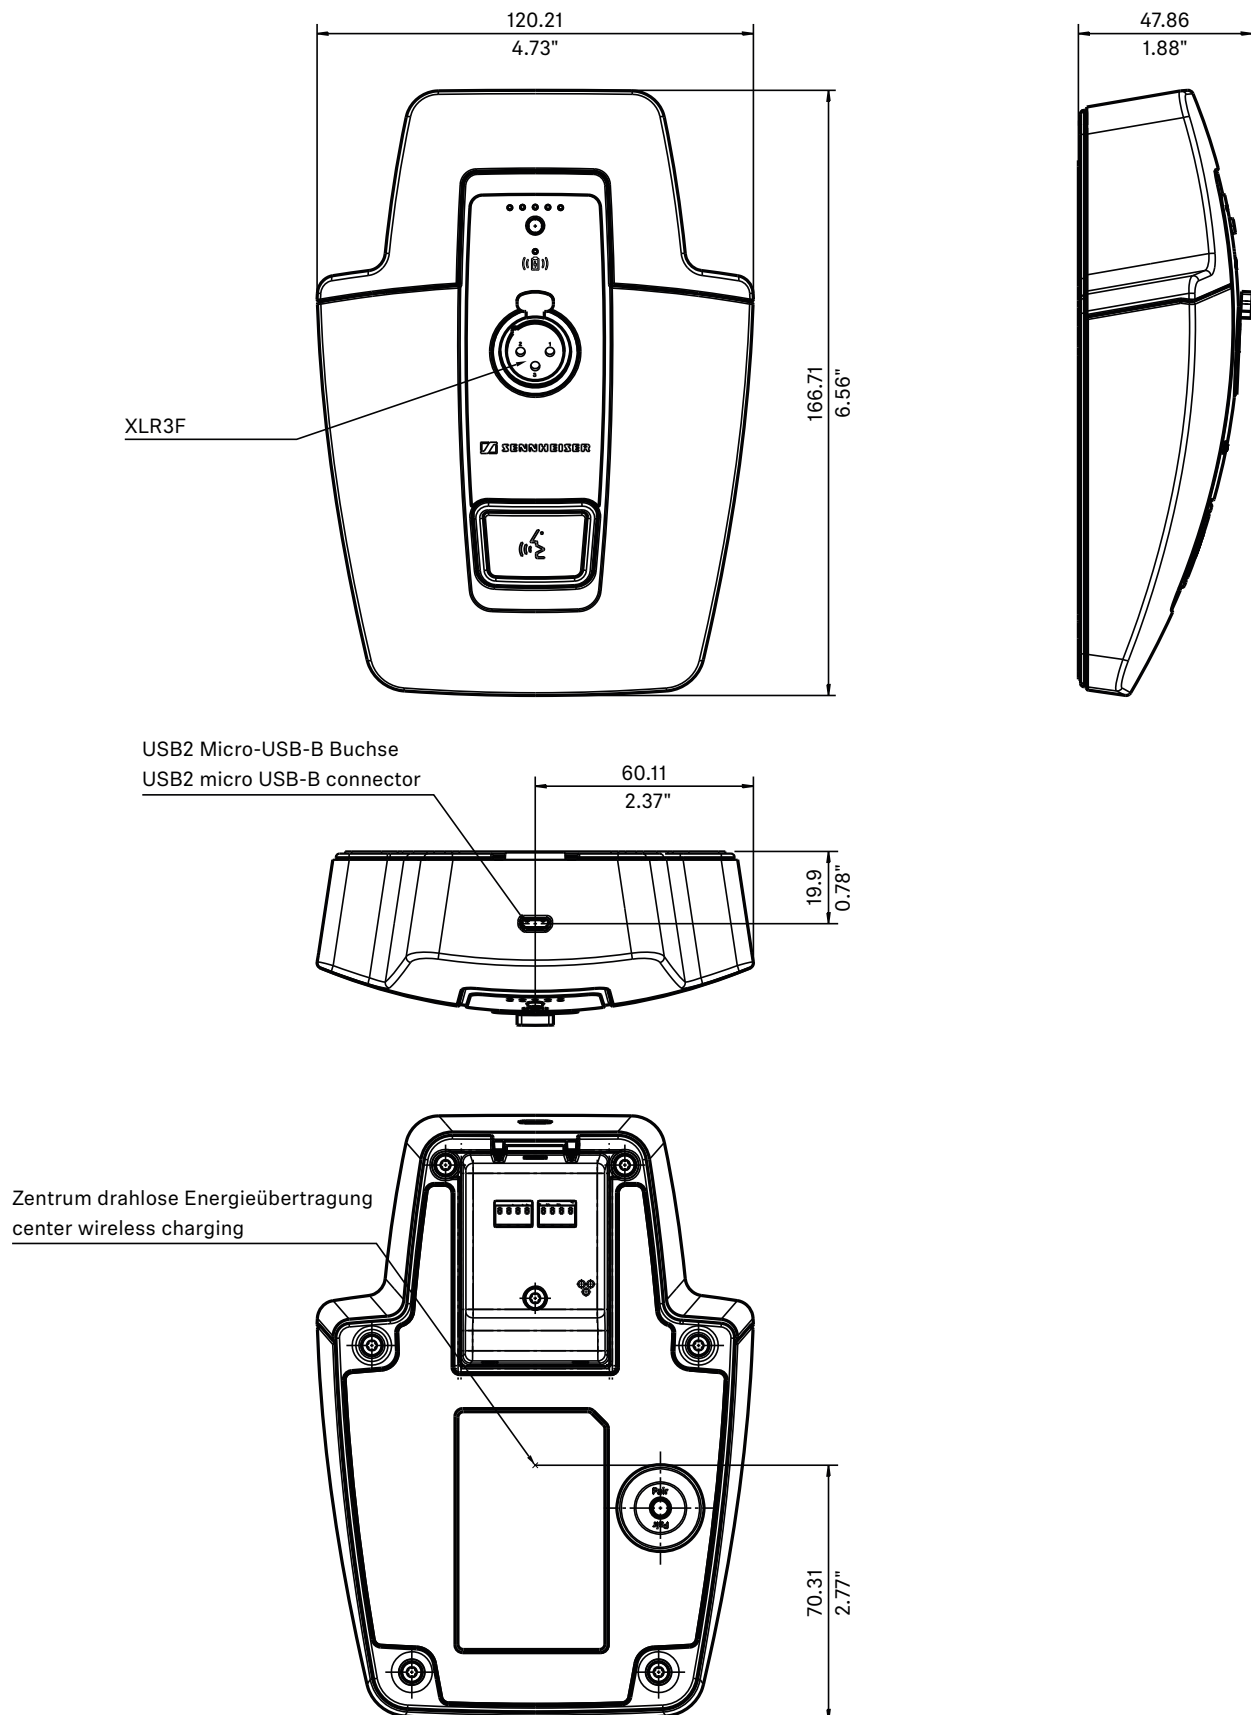



SpeechLine Digital Wireless



SL Tablestand 153-S DW

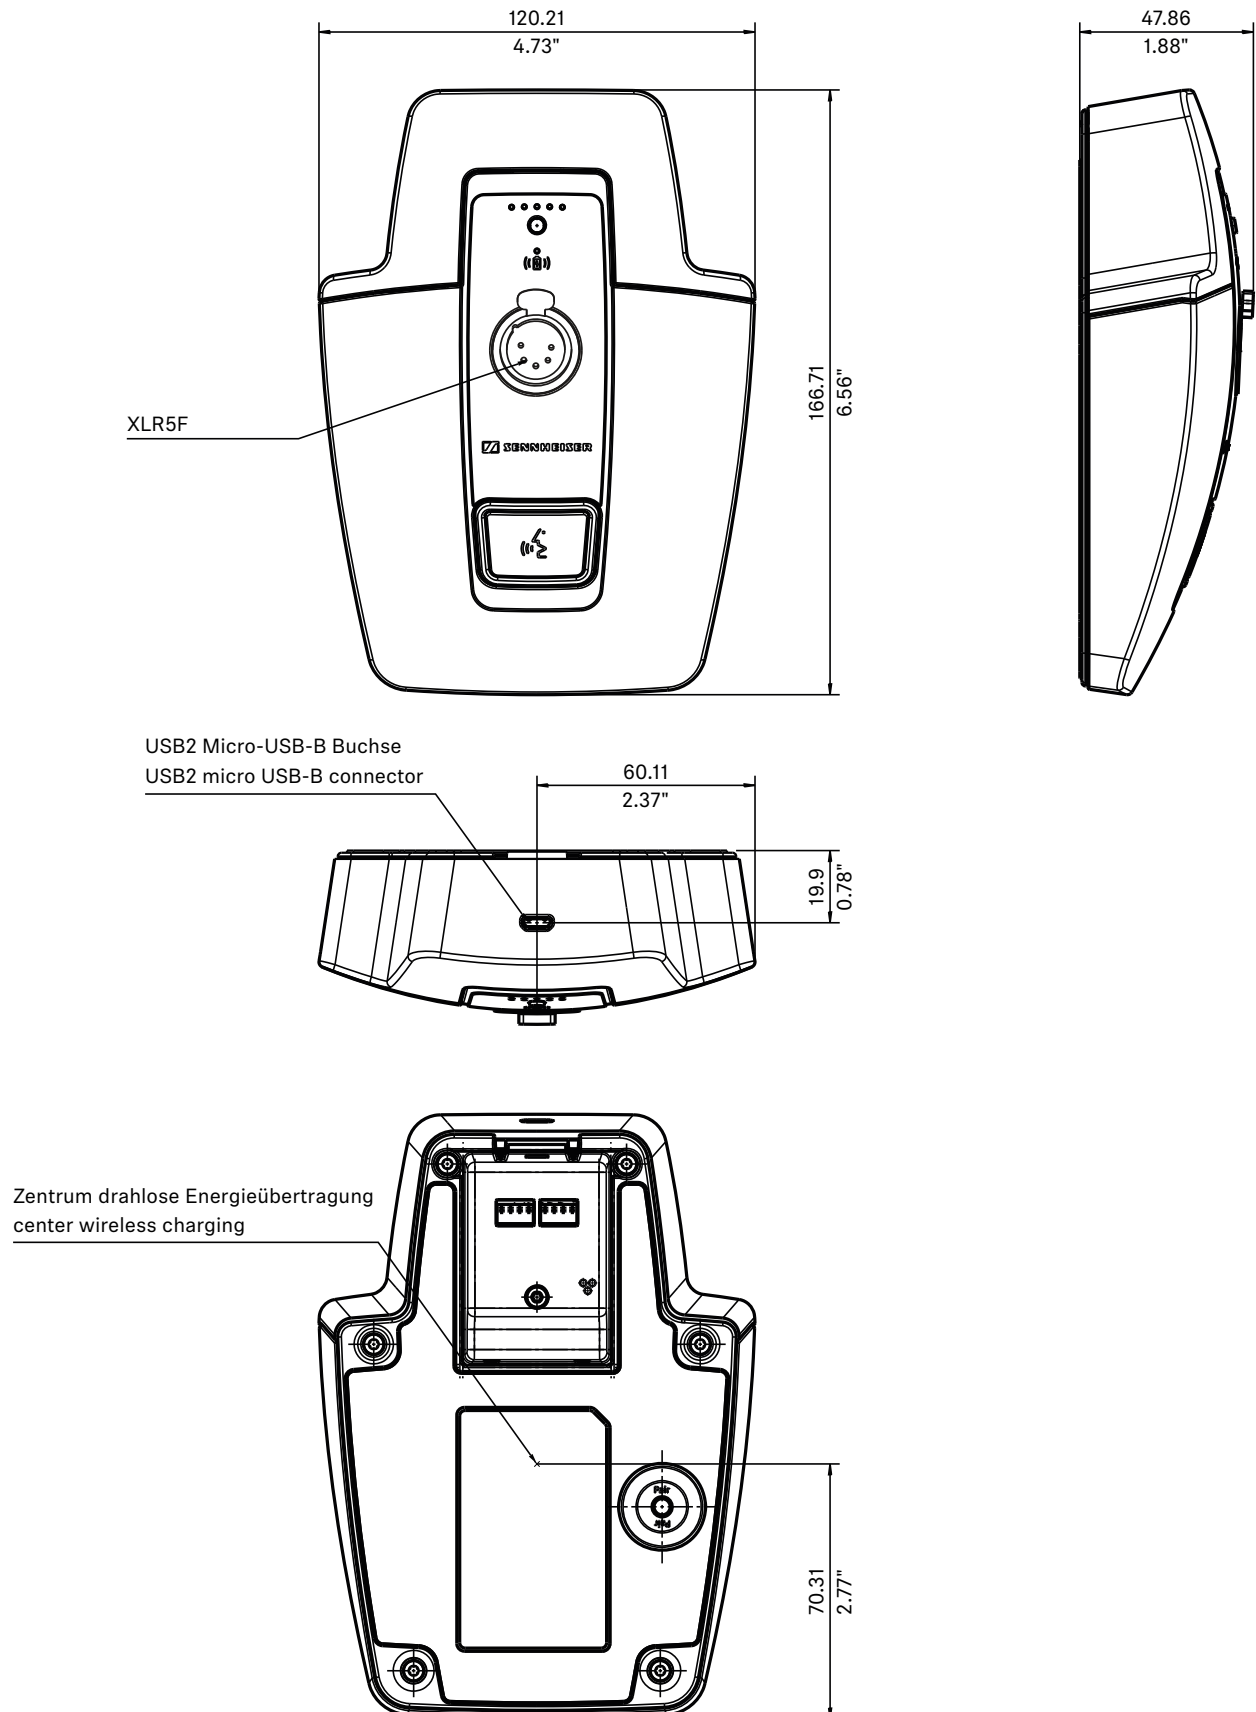





SpeechLine Digital Wireless

SL Boundary 114-S DW

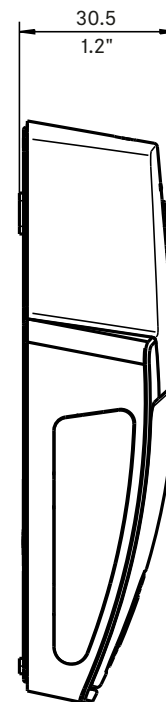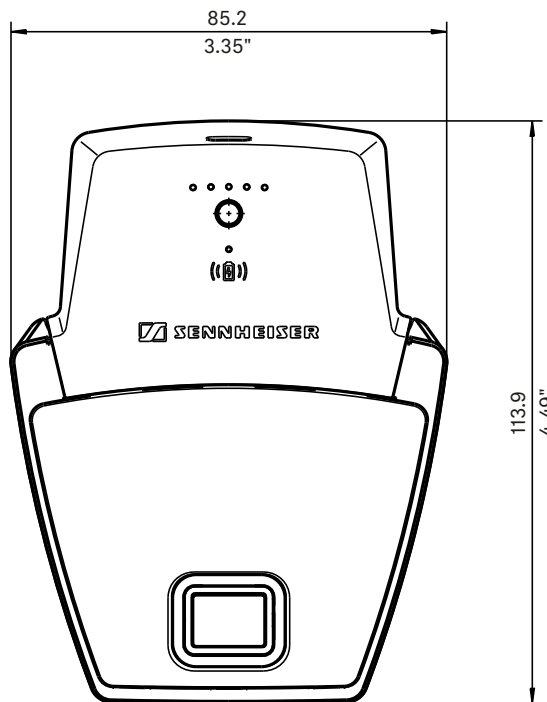

USB2 Micro-USB-B Buchse
USB2 micro USB-B connector

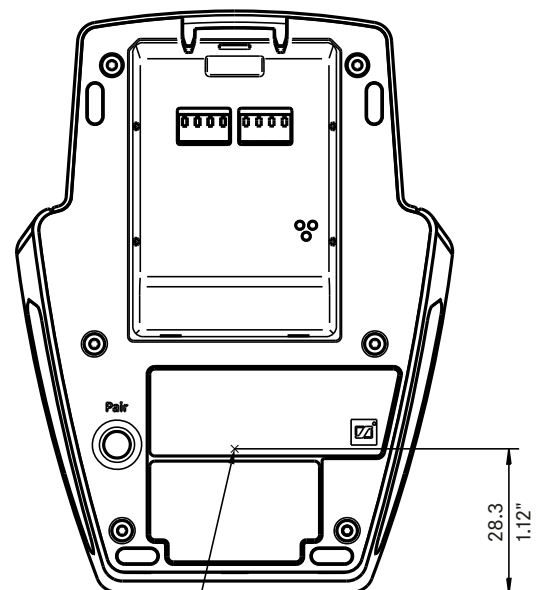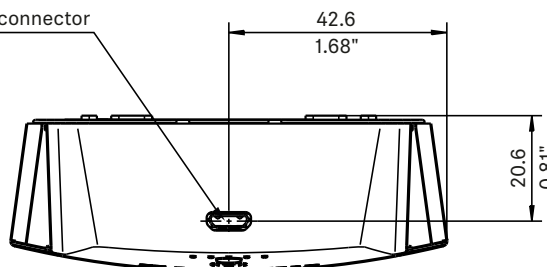



Zentrum drahtlose Energieübertragung
center wireless charging



SpeechLine Digital Wireless


SL Headmic 1

Kabel mit 3,5 mm Klinenstecker
cable with 3.5 mm jack plug

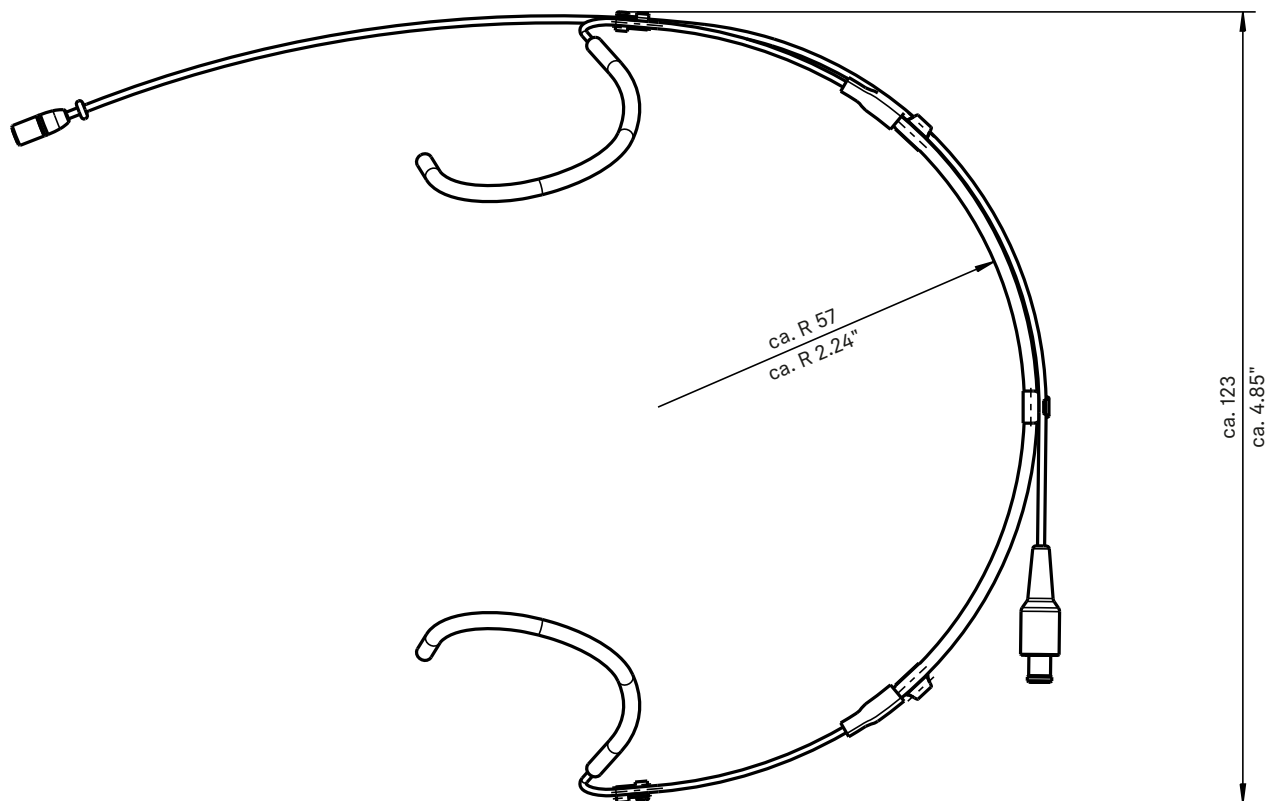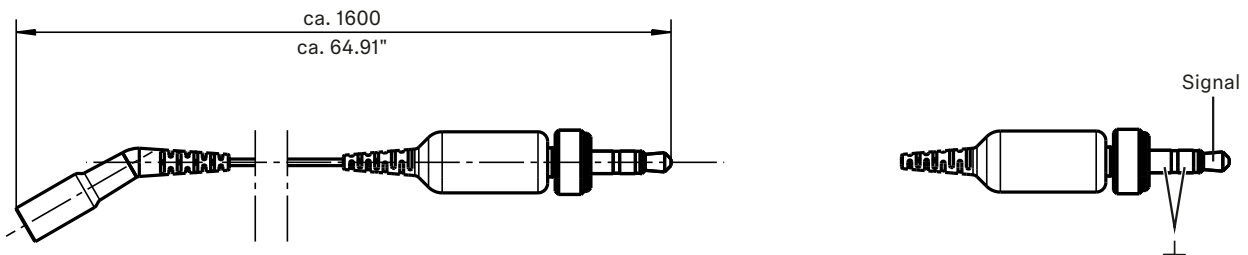





CHG 2

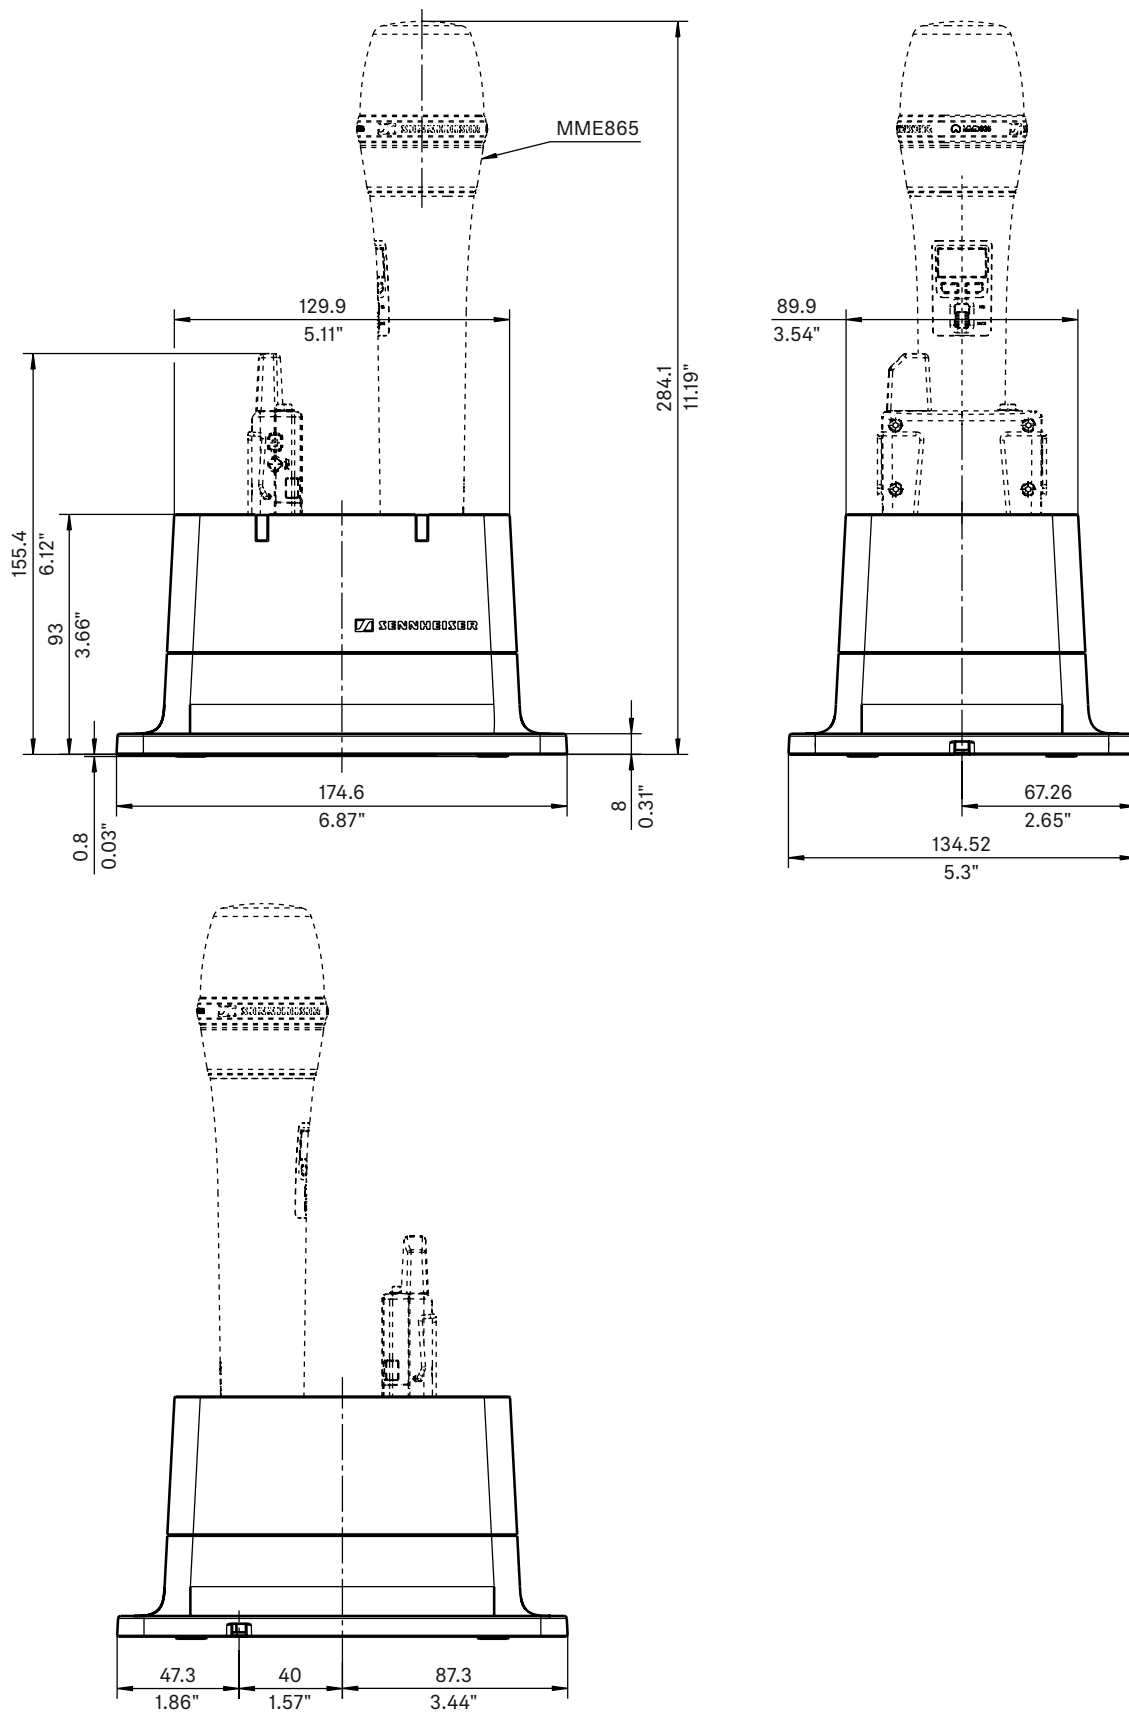



SpeechLine Digital Wireless





CHG 2

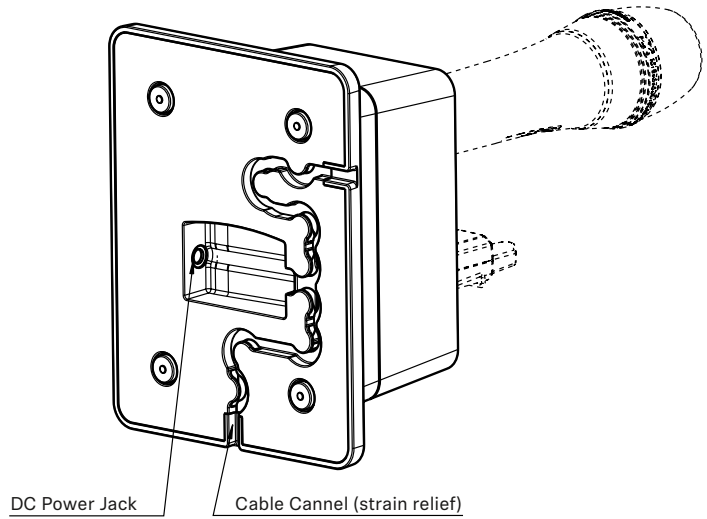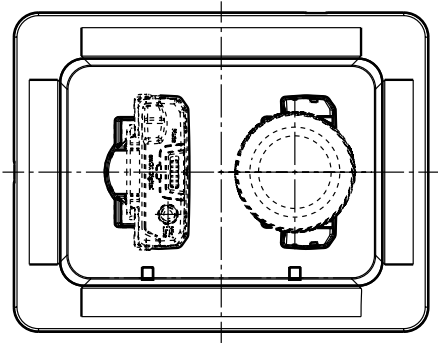



SpeechLine Digital Wireless






CHG 2N

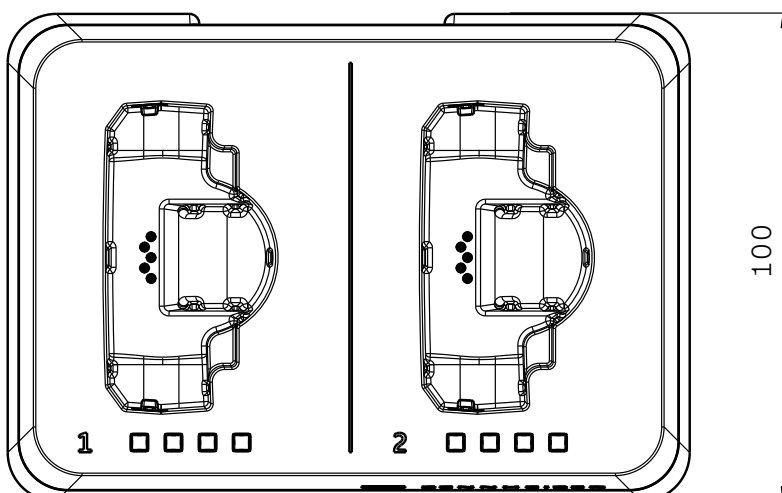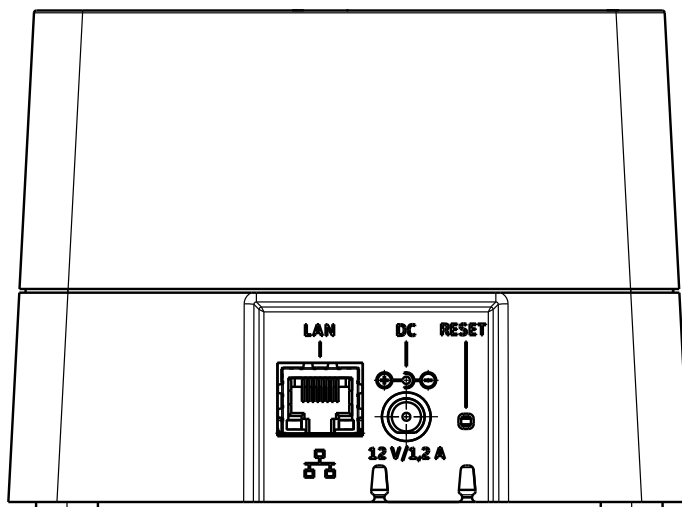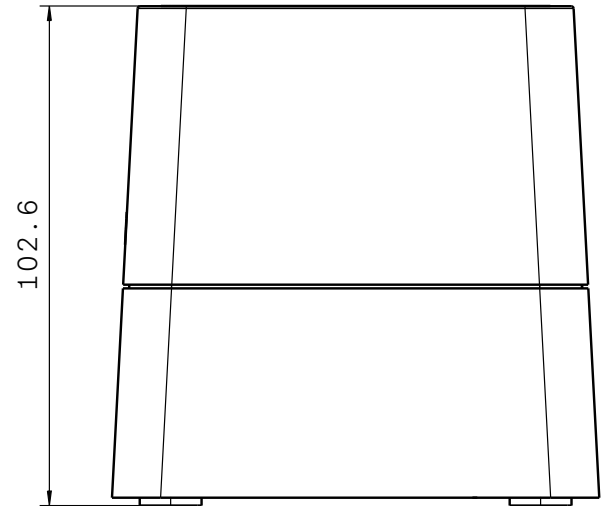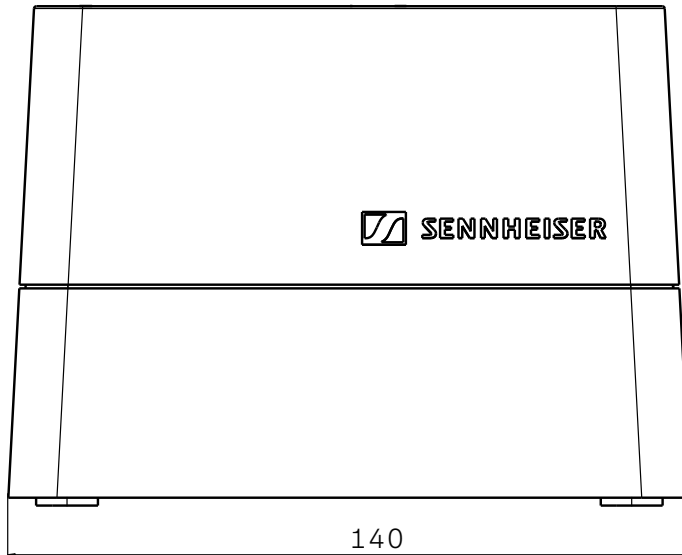




SpeechLine Digital Wireless

CHG 4N

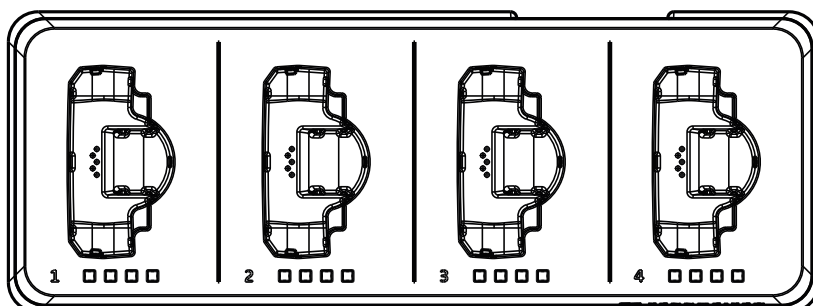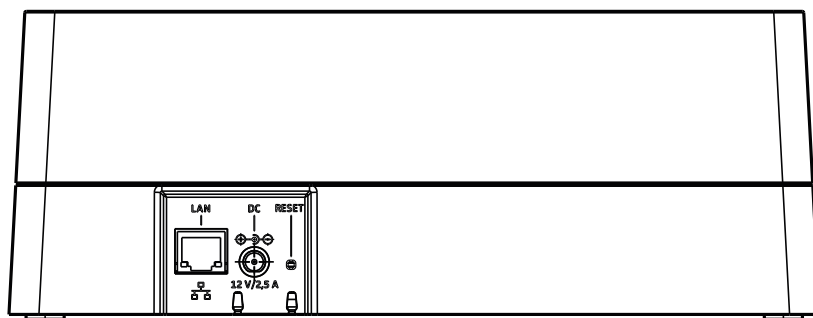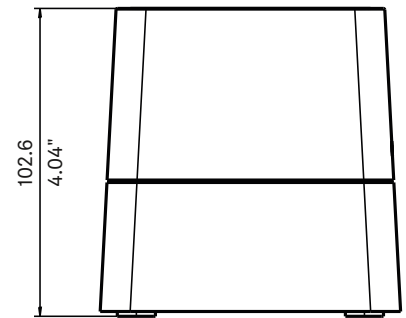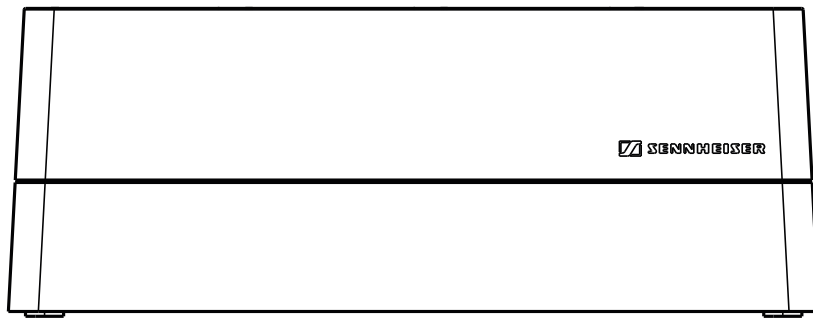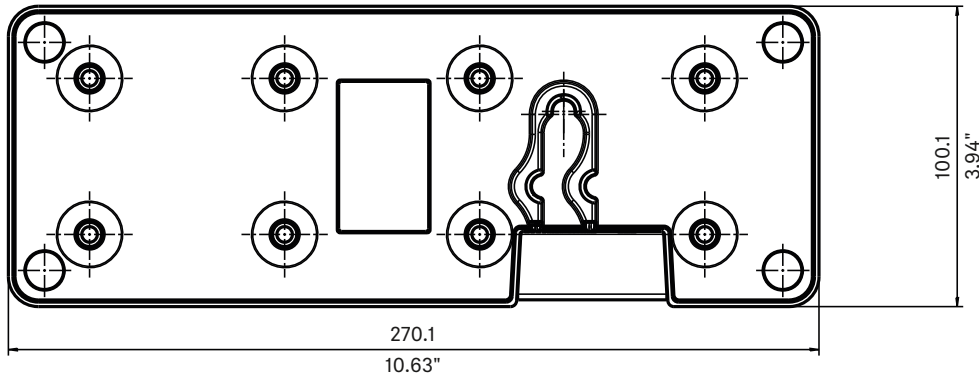


SpeechLine Digital Wireless

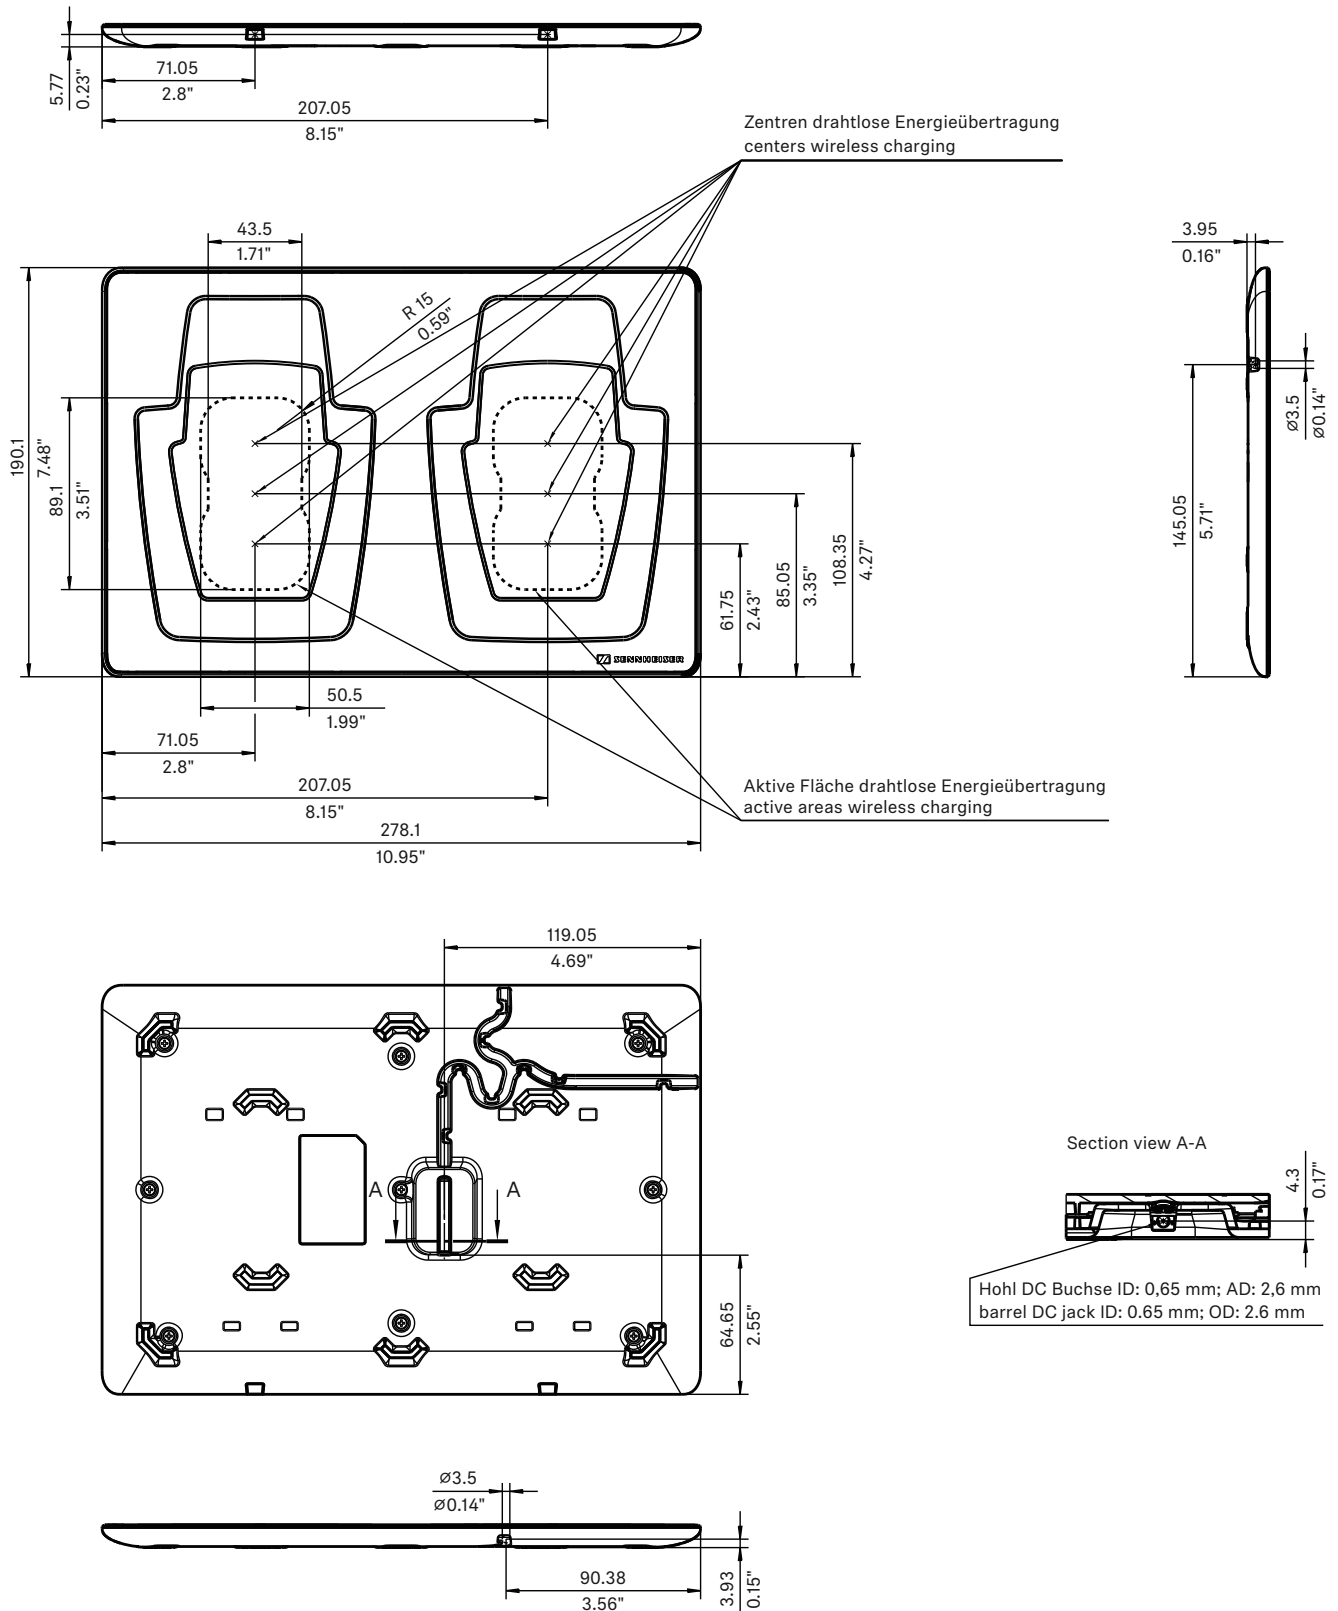CHG 2W




SpeechLine Digital Wireless

SL PASC 2

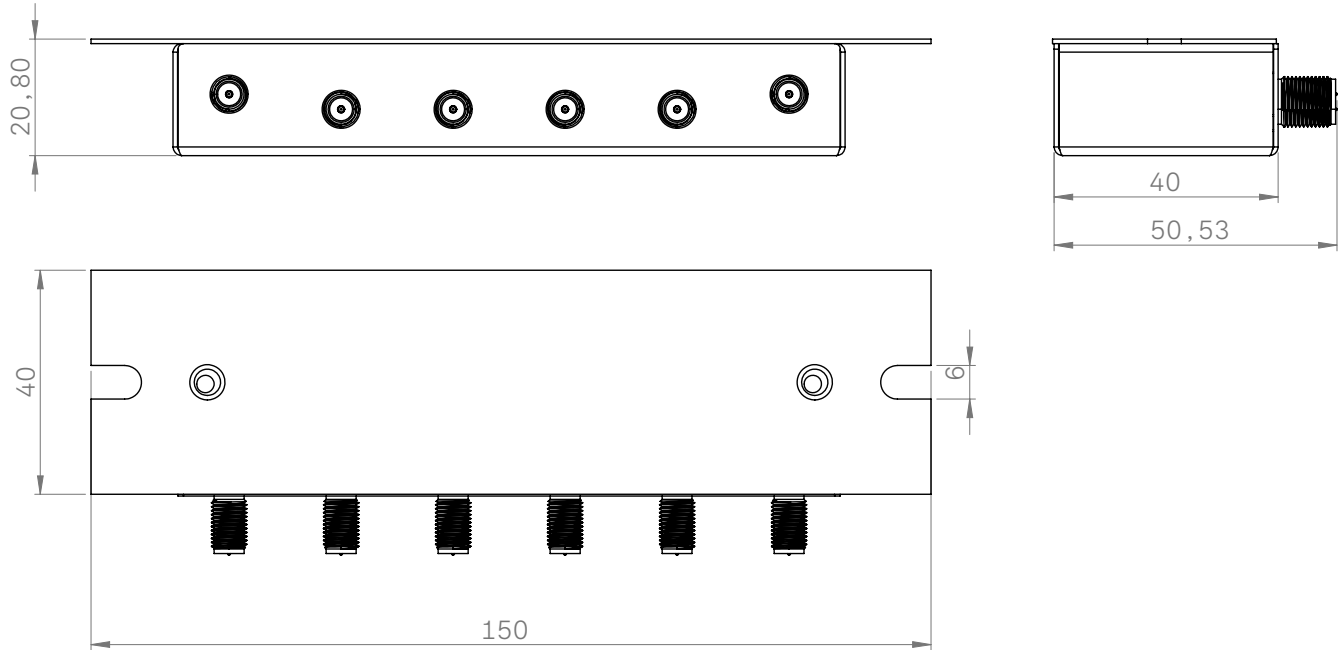



SL PASC 4

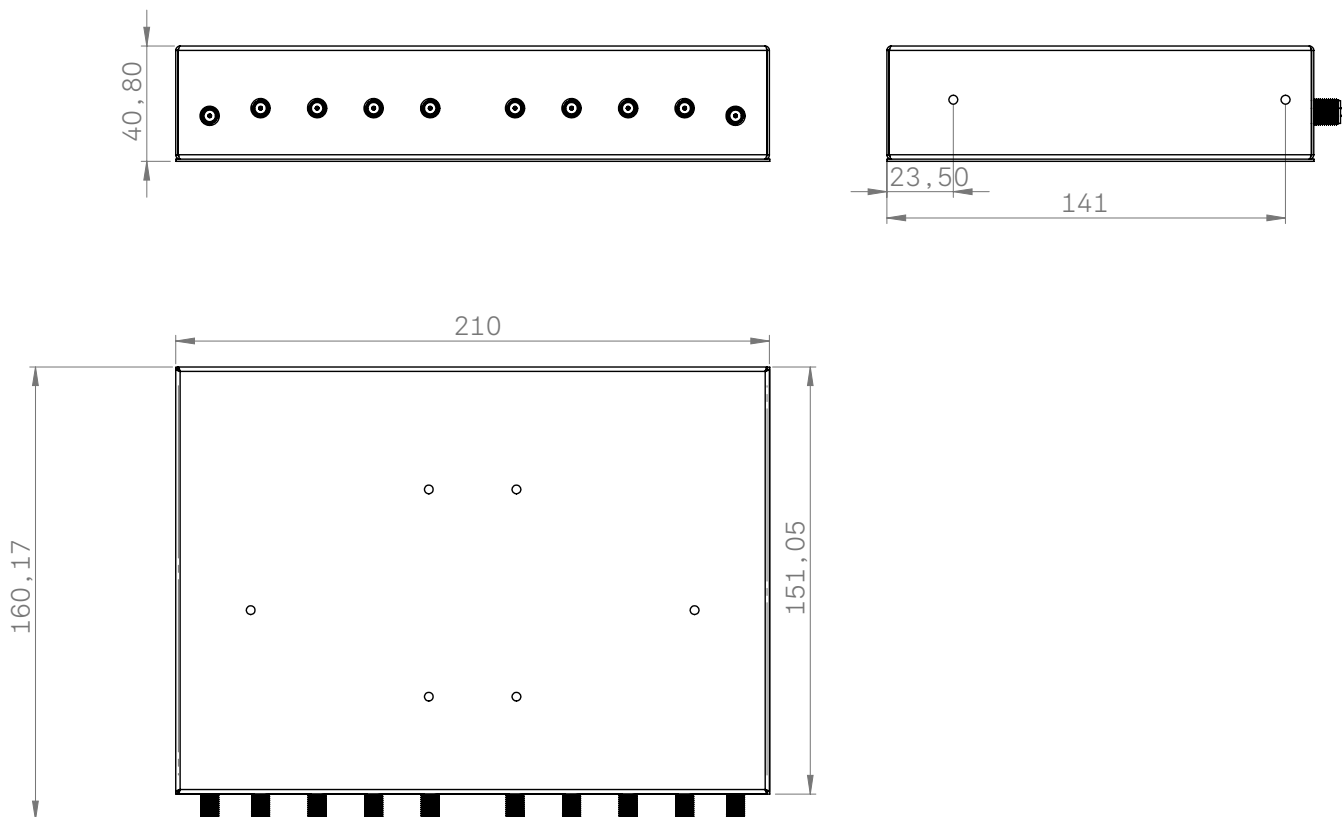



SpeechLine Digital Wireless


AWM 2

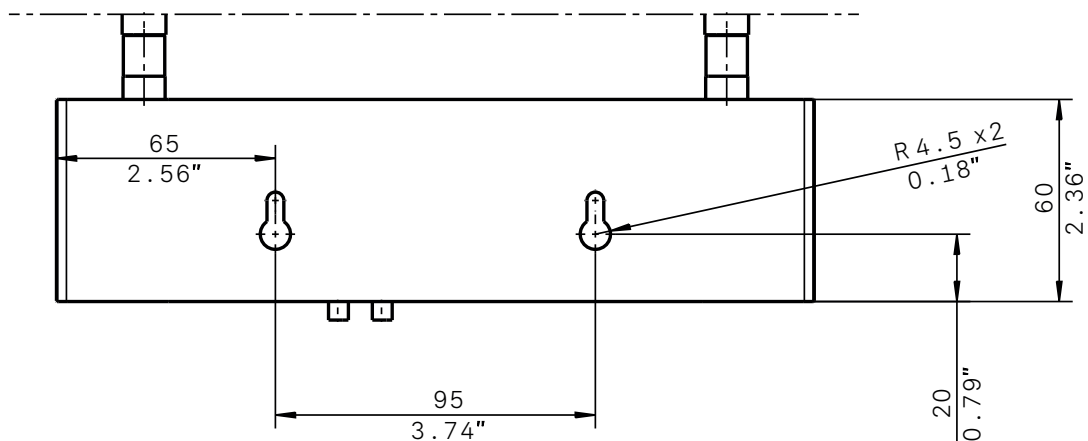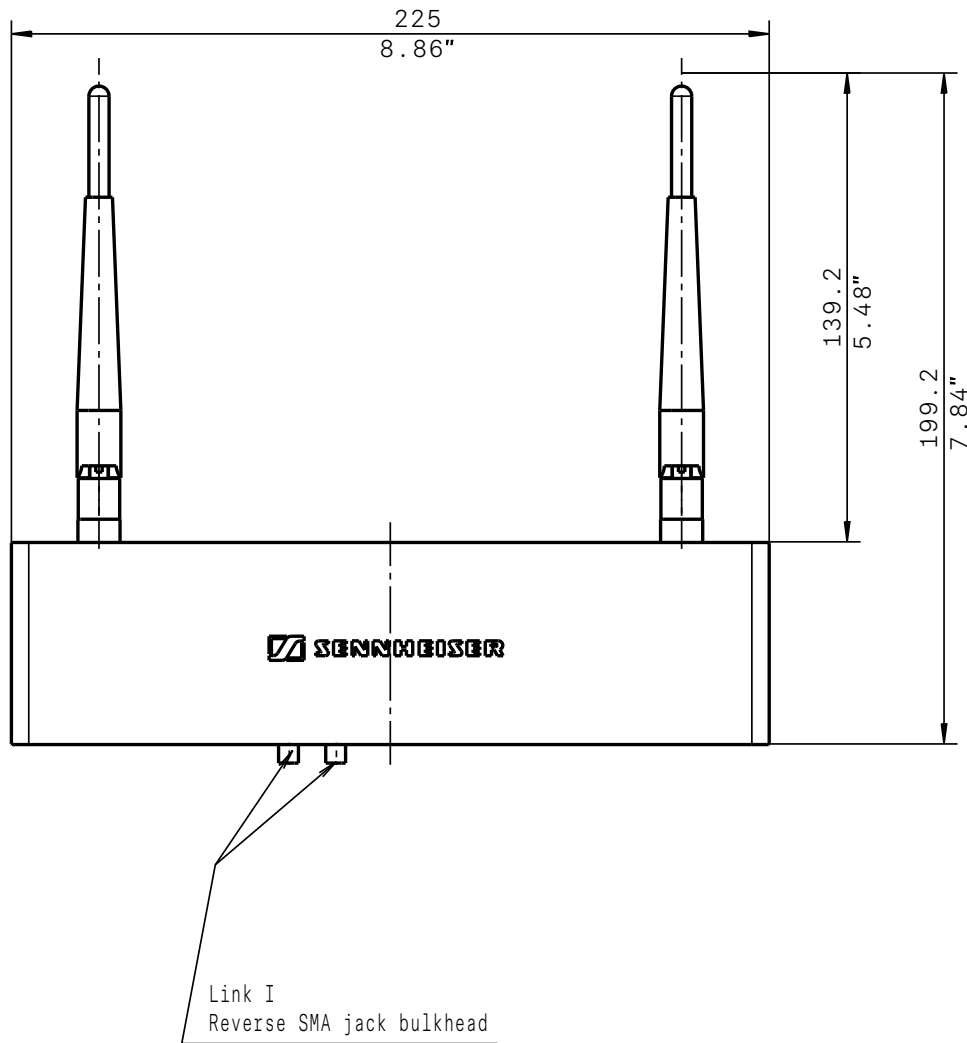



SpeechLine Digital Wireless



AWM 2

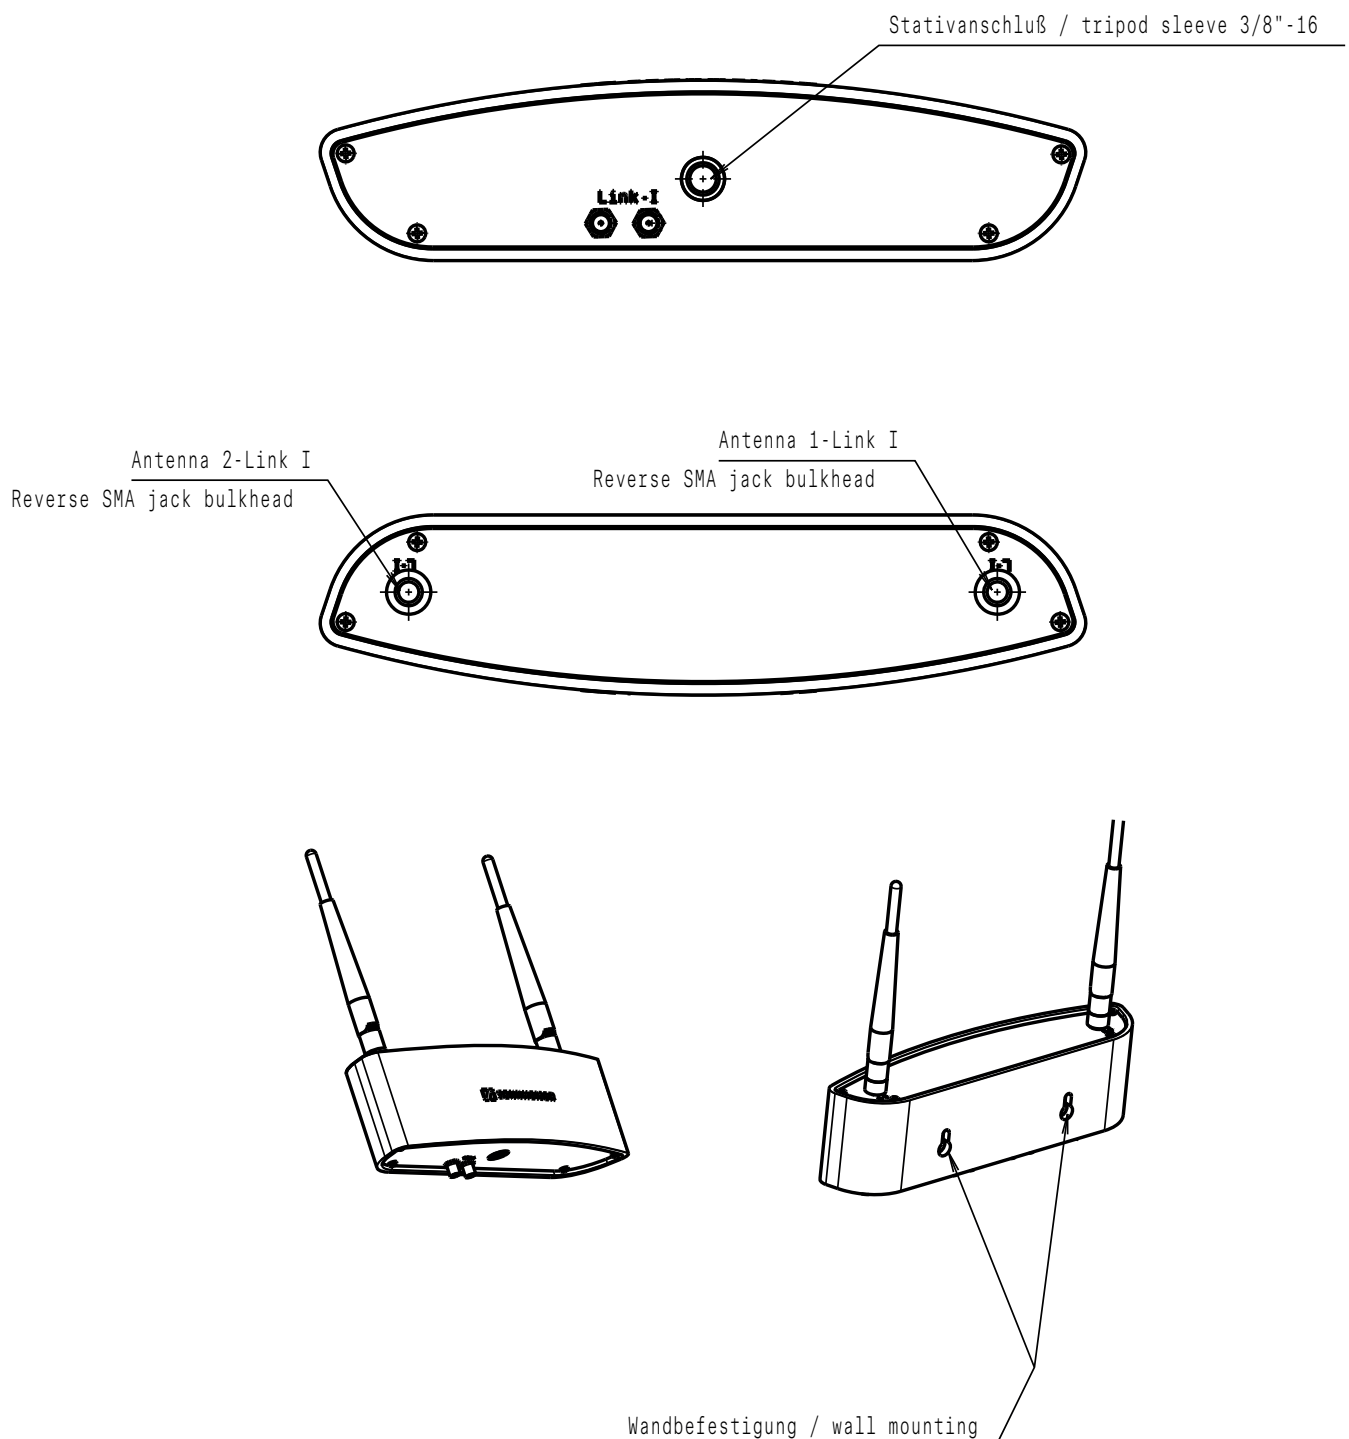



SpeechLine Digital Wireless


AWM 4

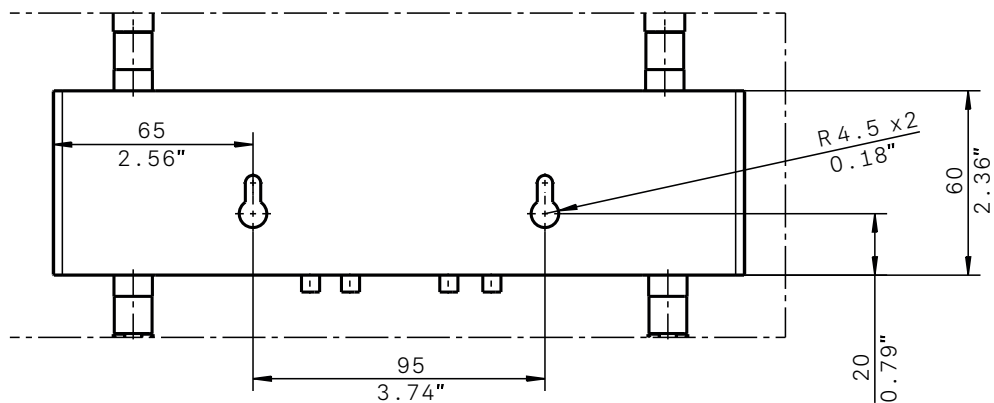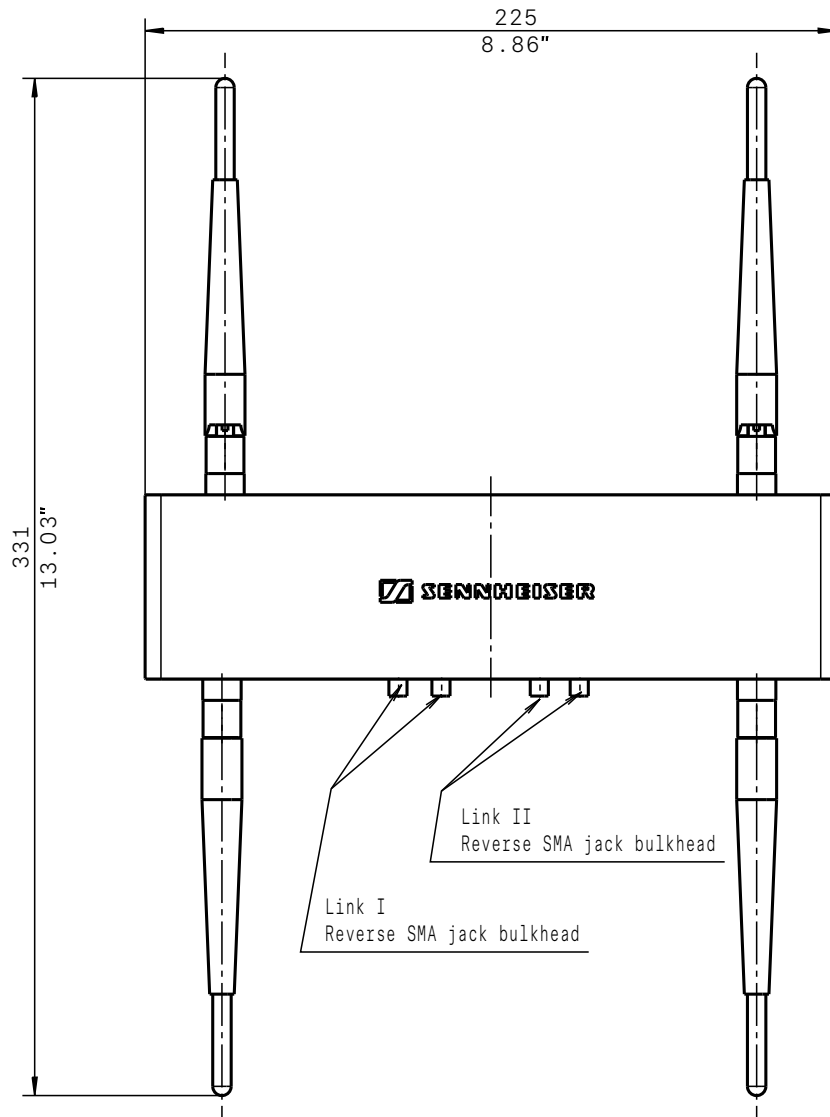



SpeechLine Digital Wireless

AWM 4

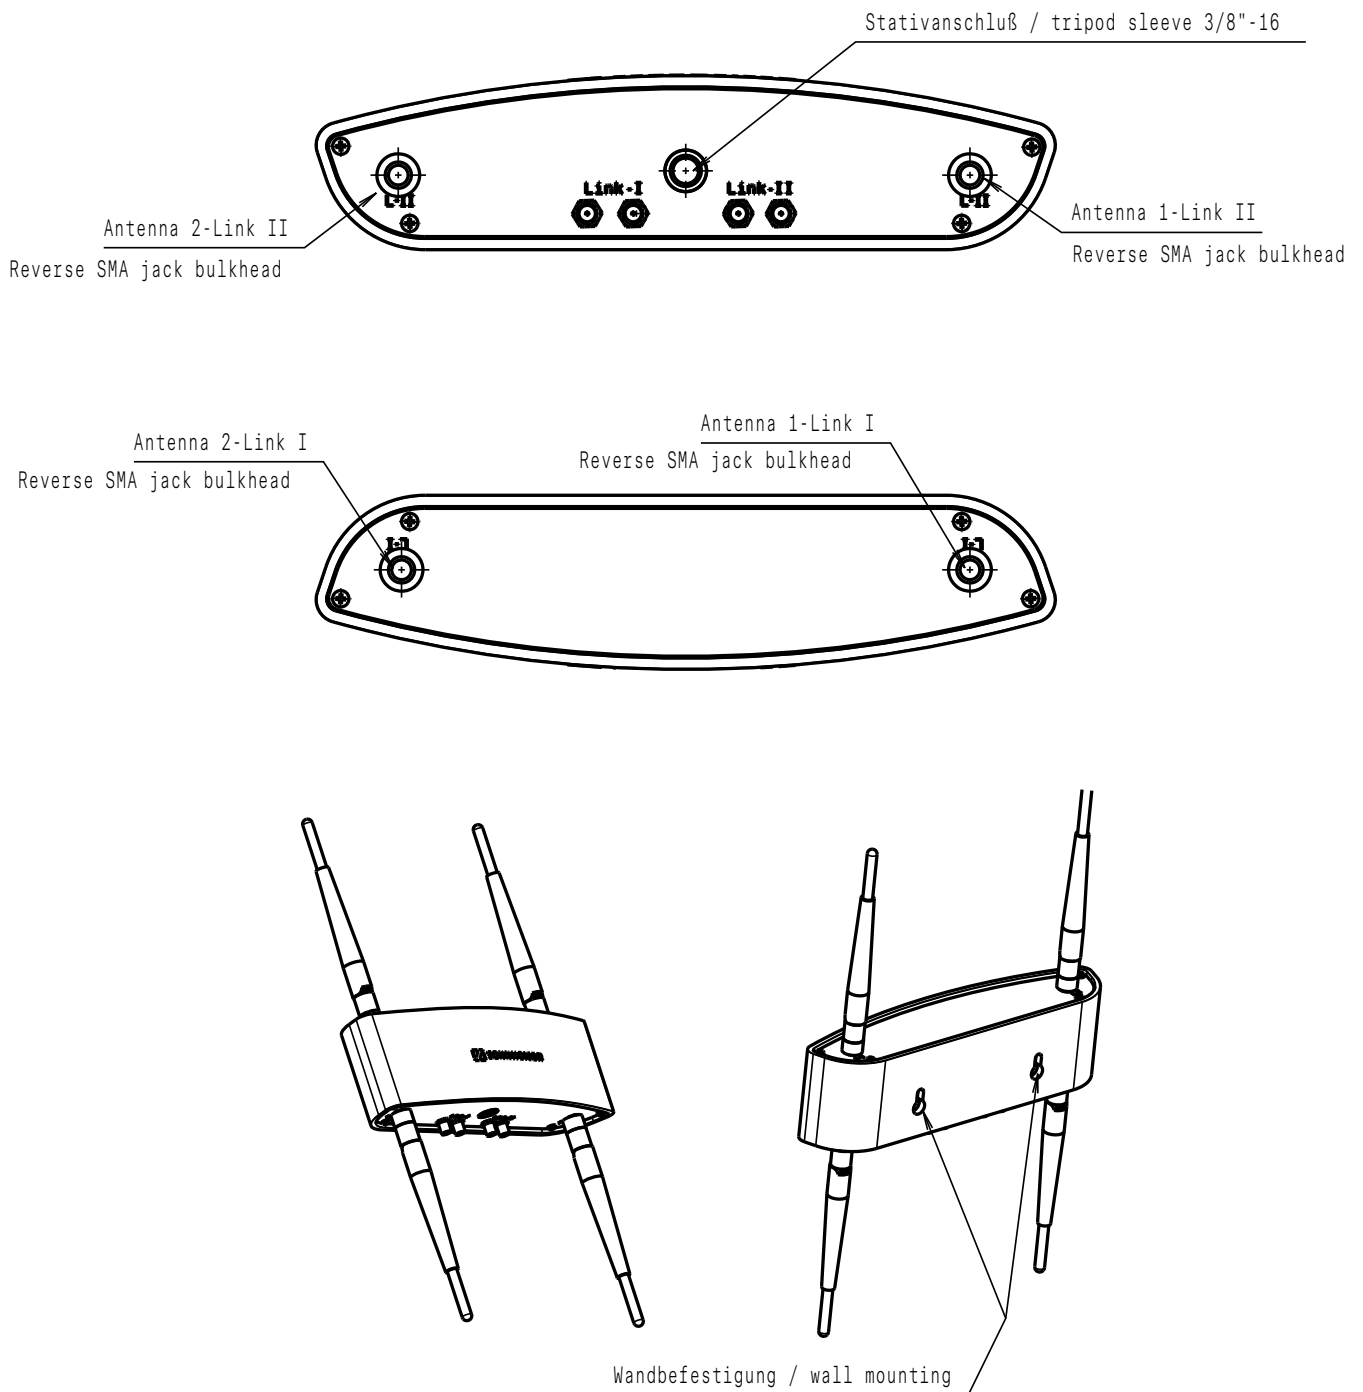



SpeechLine Digital Wireless

PRODUCT VARIANTS

Frequency range EU: 1,880 to 1,900 MHz

Product / Set	Feature	Art. No.	Variant	Countries
SL MCR 2 DW	2-channel receiver	508849	-3	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL MCR 4 DW	4-channel receiver	508854	-3	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL Rack Receiver DW	EU power supply	505882	-3 EU	Europe, India, Indonesia
	UK power supply	505892	-3 UK	Hong Kong, Singapore, Malaysia
	AU power supply	506164	-3 AU	Australia
SL Handheld DW	without microphone capsule	505884	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
	with e865 microphone capsule	505885	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL Handheld Set DW	EU power supply / Case	505881	-3 EU C	Europe, India, Indonesia
	UK power supply / Case	505891	-3 UK C	Hong Kong, Singapore, Malaysia
	AU power supply / Case	506163	-3 AU C	Australia
	EU power supply / Rackmount	505888	-3 EU R	Europe, India, Indonesia
	UK power supply / Rackmount	505895	-3 UK R	Hong Kong, Singapore, Malaysia
	AU power supply / Rackmount	506167	-3 AU R	Australia
SL Bodypack DW		505883	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL Lavalier Set DW	EU power supply / Case	505879	-3 EU C	Europe, India, Indonesia
	UK power supply / Case	505889	-3 UK C	Hong Kong, Singapore, Malaysia
	AU power supply / Case	506161	-3 AU C	Australia
	EU power supply / Rackmount	505886	-3 EU R	Europe, India, Indonesia
	UK power supply / Rackmount	505893	-3 UK R	Hong Kong, Singapore, Malaysia
	AU power supply / Rackmount	506165	-3 AU R	Australia
SL Headmic Set DW	EU power supply / Case	505880	-3 EU C	Europe, India, Indonesia
	UK power supply / Case	505890	-3 UK C	Hong Kong, Singapore, Malaysia
	AU power supply / Case	506162	-3 AU C	Australia
	EU power supply / Rackmount	505887	-3 EU R	Europe, India, Indonesia
	UK power supply / Rackmount	505894	-3 UK R	Hong Kong, Singapore, Malaysia
	AU power supply / Rackmount	506166	-3 AU R	Australia
SL Tablestand 133-S DW	black	506610	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL TS 133 GN Set DW	EU power supply	506615	-3 EU	Europe, India, Indonesia
	UK power supply	506618	-3 UK	Hong Kong, Singapore, Malaysia
	AU power supply	506621	-3 AU	Australia
SL Tablestand 153-S DW	black	506612	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia
SL TS 153 GN-L Set DW	EU power supply	506616	-3 EU	Europe, India, Indonesia
	UK power supply	506619	-3 UK	Hong Kong, Singapore, Malaysia
	AU power supply	506622	-3 AU	Australia
SL Boundary 114-S DW	black	506607	-3 EU	Europe & UK, India, Indonesia, Hong Kong, Singapore, Malaysia, Australia



SpeechLine Digital Wireless

Product / Set	Feature	Art. No.	Variant	Countries
SL Boundary Set DW	EU power supply	506614	-3 EU	Europe, India, Indonesia
	UK power supply	506617	-3 UK	UK, Hong Kong, Singapore, Malaysia
	AU power supply	506620	-3 AU	Australia

Frequency range USA: 1,920 to 1,930 MHz

Product / Set	Feature	Art. No.	Variant	Countries
SL MCR 2 DW	2-channel receiver	508850	-4	USA, Canada, Latin America
SL MCR 4 DW	4-channel receiver	508855	-4	USA, Canada, Latin America
SL Rack Receiver DW	EU power supply	506171	-4 EU	Latin America
	US power supply	505899	-4 US	USA, Canada
SL Handheld DW	without microphone capsule	505902	-4 US	USA, Canada, Latin America
	with e865 microphone capsule	505901	-4 US	USA, Canada, Latin America
SL Handheld Set DW	US power supply / Case	505898	-4 US C	USA, Canada
	EU power supply / Case	506170	-4 EU C	Latin America
	US power supply / Rackmount	505905	-4 US R	USA, Canada
	EU power supply / Rackmount	506174	-4 EU R	Latin America
SL Bodypack DW		505900	-4 US	USA, Canada, Latin America
SL Lavalier Set DW	US power supply / Case	505896	-4 US C	USA, Canada
	EU power supply / Case	506168	-4 EU C	Latin America
	US power supply / Rackmount	505903	-4 US R	USA, Canada
	EU power supply / Rackmount	506172	-4 EU R	Latin America
SL Headmic Set DW	US power supply / Case	505897	-4 US C	USA, Canada
	EU power supply / Case	506169	-4 EU C	Latin America
	US power supply / Rackmount	505904	-4 US R	USA, Canada
	EU power supply / Rackmount	506173	-4 EU R	Latin America
SL Tablestand 133-S DW	black	506626	-4 US	USA, Canada, Latin America
SL TS 133 GN Set DW	EU power supply	506634	-4 EU	Latin America
	US power supply	506631	-4 US	USA, Canada
SL Tablestand 153-S DW	black	506628	-4 US	USA, Canada, Latin America
SL TS 153 GN-L Set DW	EU power supply	506635	-4 EU	Latin America
	US power supply	506632	-4 US	USA, Canada
SL Boundary 114-S DW	black	506623	-4 US	USA, Canada, Latin America
SL Boundary Set DW	EU power supply	506633	-4 EU	Latin America
	US power supply	506630	-4 US	USA, Canada



SpeechLine Digital Wireless

Frequency range Japan: 1,893 to 1,906 MHz

Product / Set	Feature	Art. No.	Variant	Countries
SL MCR 2 DW	2-channel receiver	508851	-5	Japan
SL MCR 4 DW	4-channel receiver	508856	-5	Japan
SL Rack Receiver DW	US power supply	505919	-5 US	Japan
SL Handheld DW	without microphone capsule	505922	-5 US	Japan
	with e865 microphone capsule	505921	-5 US	Japan
SL Handheld Set DW	US power supply / Case	505918	-5 US C	Japan
	US power supply / Rackmount	505925	-5 US R	Japan
SL Bodypack DW		505920	-5 US	Japan
SL Lavalier Set DW	US power supply / Case	505916	-5 US C	Japan
	US power supply / Rackmount	505923	-5 US R	Japan
SL Headmic Set DW	US power supply / Case	505917	-5 US C	Japan
	US power supply / Rackmount	505924	-5 US R	Japan
SL Tablestand 133-S DW	black	506649	-5 US	Japan
SL TS 133 GN Set DW	US power supply	506654	-5 US	Japan
SL Tablestand 153-S DW	black	506651	-5 US	Japan
SL TS 153 GN-L Set DW	US power supply	506655	-5 US	Japan
SL Boundary 114-S DW	black	506646	-5 US	Japan
SL Boundary Set DW	US power supply	506653	-5 US	Japan

Frequency range Taiwan 1,880 to 1,895 MHz

Product / Set	Feature	Art. No.	Variant	Countries
SL MCR 2 DW	2-channel receiver	508852	-6	Taiwan
SL MCR 4 DW	4-channel receiver	508857	-6	Taiwan
SL Rack Receiver DW	US power supply	505909	-6 US	Taiwan
SL Handheld DW	without microphone capsule	505912	-6 US	Taiwan
	with e865 microphone capsule	505911	-6 US	Taiwan
SL Handheld Set DW	US power supply / Case	505908	-6 US C	Taiwan
	US power supply / Rackmount	505915	-6 US R	Taiwan
SL Bodypack DW		505910	-6 US	Taiwan
SL Lavalier Set DW	US power supply / Case	505906	-6 US C	Taiwan
	US power supply / Rackmount	505913	-6 US R	Taiwan
SL Headmic Set DW	US power supply / Case	505907	-6 US C	Taiwan
	US power supply / Rackmount	505914	-6 US R	Taiwan
SL Tablestand 133-S DW	black	506639	-6 US	Taiwan
SL TS 133 GN Set DW	US power supply	506644	-6 US	Taiwan
SL Tablestand 153-S DW	black	506641	-6 US	Taiwan
SL TS 153 GN-L Set DW	US power supply	506645	-6 US	Taiwan
SL Boundary 114-S DW	black	506636	-6 US	Taiwan
SL Boundary Set DW	US power supply	506643	-6 US	Taiwan



SpeechLine Digital Wireless

Frequency range Brazil 1,910 to 1,920 MHz

Product / Set	Feature	Art. No.	Variant	Countries
SL MCR 2 DW	2-channel receiver	508853	-7	Brazil
SL MCR 4 DW	4-channel receiver	508858	-7	Brazil
SL Rack Receiver DW	BR power supply	506703	-7 BR	Brazil
SL Handheld DW	without microphone capsule	506705	-7 BR	Brazil
	with e865 microphone capsule	506706	-7 BR	Brazil
SL Handheld Set DW	BR power supply / Case	506702	-7 BR C	Brazil
	BR power supply / Rackmount	506709	-7 BR R	Brazil
SL Bodypack DW		506704	-7 BR	Brazil
SL Lavalier Set DW	BR power supply / Case	506700	-7 BR C	Brazil
	BR power supply / Rackmount	506707	-7 BR R	Brazil
SL Headmic Set DW	BR power supply / Case	506701	-7 BR C	Brazil
	BR power supply / Rackmount	506708	-7 BR R	Brazil
SL Tablestand 133-S DW	black	506966	-7 BR	Brazil
SL TS 133 GN Set DW	BR power supply	506969	-7 BR	Brazil
SL Tablestand 153-S DW	black	506967	-7 BR	Brazil
SL TS 153 GN-L Set DW	BR power supply	506970	-7 BR	Brazil
SL Boundary 114-S DW	black	506965	-7 BR	Brazil
SL Boundary Set DW	BR power supply	506968	-7 BR	Brazil



SpeechLine Digital Wireless

ACCESSORIES

SL MCR Wallmount Adapter	Wallmount adapter for SL MCR DW	Art. No. 506848
GA 4	Rackmount set for SL Rack Receiver DW	Art. No. 505977
AWM 2 MK II	Wallmount antenna	Art. No. 509297
AWM 4	Wallmount antenna	Art. No. 507358
CL 1 PP	Antenna cable 1 m	Art. No. 507425
CL 5 PP	Antenna cable 5 m	Art. No. 507426
CL 10 PP	Antenna cable 10 m	Art. No. 507427
CL 20 PP	Antenna cable 20 m	Art. No. 507428
SL Headmic 1 BK - black	Headworn microphone	Art. No. 506271
SL Headmic 1 BE - beige	Headworn microphone	Art. No. 506272
SL Headmic 1 SB - silver	Headworn microphone	Art. No. 506904
SL Headmic 1 -4 BK - black	Headworn microphone	Art. No. 506905
SL Headmic 1 -4 BE - beige	Headworn microphone	Art. No. 506906
SL Headmic 1 -4 SB - silver	Headworn microphone	Art. No. 506907
CHG 2 EU	2-bay charger	Art. No. 505980
CHG 2 UK	2-bay charger	Art. No. 506218
CHG 2 US	2-bay charger	Art. No. 506219
CHG 2 AU	2-bay charger	Art. No. 506220
CHG 2N EU	Network-enabled 2-bay charger	Art. No. 508985
CHG 2N UK	Network-enabled 2-bay charger	Art. No. 508986
CHG 2N US	Network-enabled 2-bay charger	Art. No. 508987
CHG 2N AU	Network-enabled 2-bay charger	Art. No. 508988
CHG 4N EU	Network-enabled 4-bay charger	Art. No. 506800
CHG 4N UK	Network-enabled 4-bay charger	Art. No. 506801
CHG 4N US	Network-enabled 4-bay charger	Art. No. 506802
CHG 4N AU	Network-enabled 4-bay charger	Art. No. 506803
CHG 2W	Wireless Charging Base	Art. No. 506805
BA 10	Rechargeable battery pack	Art. No. 505972
BA 30	Rechargeable battery pack	Art. No. 505974
BA 40	Rechargeable battery pack	Art. No. 506656
SL PASC 2	Passive antenna splitter/combiner	Art. No. 390040
SL PASC 4	Passive antenna splitter/combiner	Art. No. 390041